

FENICE PLUS 11


PELLET AIR PLUS - Pellet stoves

CADEL

Certificate model name : FENICE PLUS 11 T1



Nominal power	kW	10,5
Reduced power	kW	3
Introduced thermal power (max)	kW	11,6
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	90
Reduced efficiency	%	90
Heating volume (min-max)	m ³	84 - 294
Nominal CO at 13% O ₂	%	0,013
Reduced CO at 13% O ₂	%	0,022
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	230 - 159
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	5 - 5
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	130 - 100
Dust content at 13% O ₂ (min-max)	mg/Nm ³	20 - 15
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	20
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,7 - 2,5
Autonomy (min-max)	h	29 - 8
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	110
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	4 - 8
Exhaust fumes temperature (max)	°C	175
Net weight	kg	133
Gross weight	kg	143
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

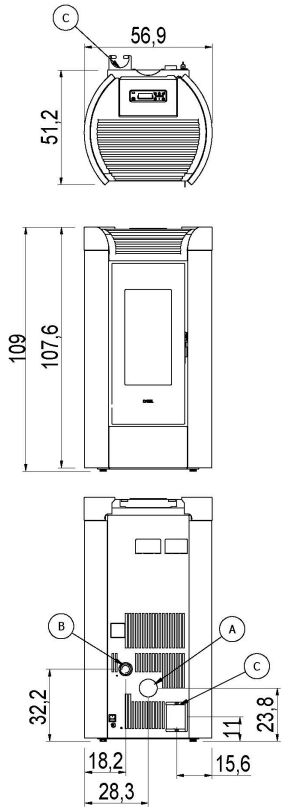


MATCH

7022061		White - gold steel	EAN 8053859015383
7022062		Titanium - anthracite steel	EAN 8053859015390
7022063		Anthracite - titanium steel	EAN 8053859015406
OPTIONAL :			
5022002		Upper + concentric exhaust kit	EAN 8053859015543

PLUS

	Cast iron burning pot		Sealed chamber		Ducting with 1 independent motor
	Integrated Wi - Fi		Connection to the room thermostat		Comfort mode
	Back exhaust		Bluetooth		Cast iron door
	Daily weekly programming		Concentric flue kit (optional)		Cast iron inner


STOVE PACKING



L (cm)	H (cm)	P (cm)
80	125	65


VOLUME (m ³)
0,65

LINING PACKING



	L (cm)	H (cm)	P (cm)

STOCKING



TRANSPORT

