

KOBE 11




PELLET AIR - Pellet stoves

CADEL

Certificate model name : KOBE 11 T1



Nominal power	kW	10,5
Reduced power	kW	3
Introduced thermal power (max)	kW	11,6
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	90
Reduced efficiency	%	90
Heating volume (min-max)	m ³	84 - 294
Nominal CO at 13% O ₂	%	0,013
Reduced CO at 13% O ₂	%	0,022
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	230 - 159
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	5 - 5
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	130 - 100
Dust content at 13% O ₂ (min-max)	mg/Nm ³	20 - 15
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	25
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,7 - 2,5
Autonomy (min-max)	h	36 - 10
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	110
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	4 - 8
Exhaust fumes temperature (max)	°C	175
Net weight	kg	111
Gross weight	kg	121
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-




MATCH

7022056	NEUTRAL STRUCTURE	EAN 8053859015338
6922006	White steel	EAN 8053859015260
6922007	Red steel	EAN 8053859015277
6922008	Anthracite steel	EAN 8053859015284
6922009	Steel light bronze	EAN 8053859015291
6922010	Steel titanium	EAN 8053859015307


OPTIONAL :

5022002	Upper + concentric exhaust kit	EAN 8053859015543
---------	--------------------------------	-------------------

PLUS

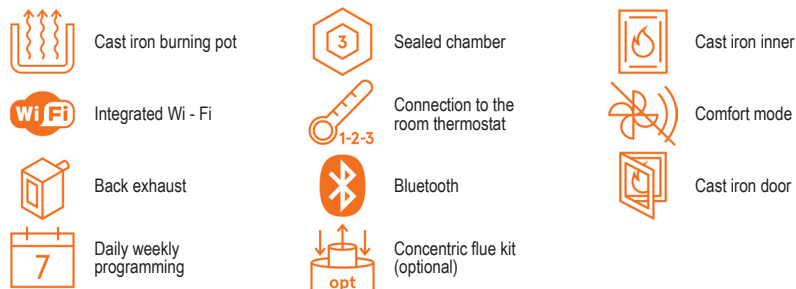


STOVE PACKING



L (cm)	H (cm)	P (cm)
80	125	65


VOLUME (m ³)
0,65

LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	57	105	11,5

STOCKING



TRANSPORT

