


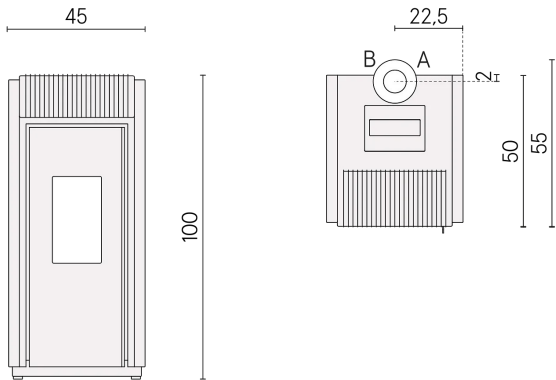

Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,9 - 7,0
Introduced thermal power (at max)	kW	7,9
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	85
Useful efficiency (at min-at max)	%	90 - 89
Heatable volume (at min-at max)	m³	83 - 200
CO ₂ (min-max)	%	7,8 - 12,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	220 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	2 - 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	110 - 99
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	20 - 15
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	16
Hourly consumption (at min-at max)	kg/h	0,6 - 1,7
Autonomy (at min-at max)	h	27 - 9
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	350
Operating electrical absorption (at max)	W	74
Chimney flue depression (at min-at max)	Pa	11 - 11
Mass of smoke (at min-at max)	g/sec	3,0 - 5,0
Exhaust fumes temperature (at min-at max)	°C	164 - 239
Distance from material comb. (back/side/under)	mm	200 / 300 / 0
Distance to material comb. (front/top)	mm	650 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	130
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0
Appliance Type (tightness)	Type	CC50

PLUS

5 stars D.M. 186	Upper exhaust	Integrated concentric outlet (80-130 mm)
Shield	Magic Glass	Remote control (optional)
Sealed Chamber	Cast iron burning pot	Connection to the external thermostat

AVAILABLE FINISHES

7025001	Steel White	EAN 8053859021100
7025002	Steel Titanium	EAN 8053859021117
7025003	Steel Anthracite	EAN 8053859021742

OPTIONAL

5024010	Remote control with thermostat	EAN 8053859020943
---------	--------------------------------	-------------------

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022 / EN 16510-2-6:2022

CE

A+

STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	117	60

Volume (m³)	0,56
-------------	------

Gross weight (kg)	85
-------------------	----

Net weight (kg)	75
-----------------	----

STORAGE

	<table><tr><td>N° (max)</td></tr><tr><td>2</td></tr></table>	N° (max)	2
N° (max)			
2			
	<table><tr><td>MAX 2</td></tr><tr><td>1</td></tr></table>	MAX 2	1
MAX 2			
1			

TRANSPORT

66 pz