


GRACE 7 UP T2

CADEL

Certificate model name: GRACE 7 UP T2

www.cadelsrl.com

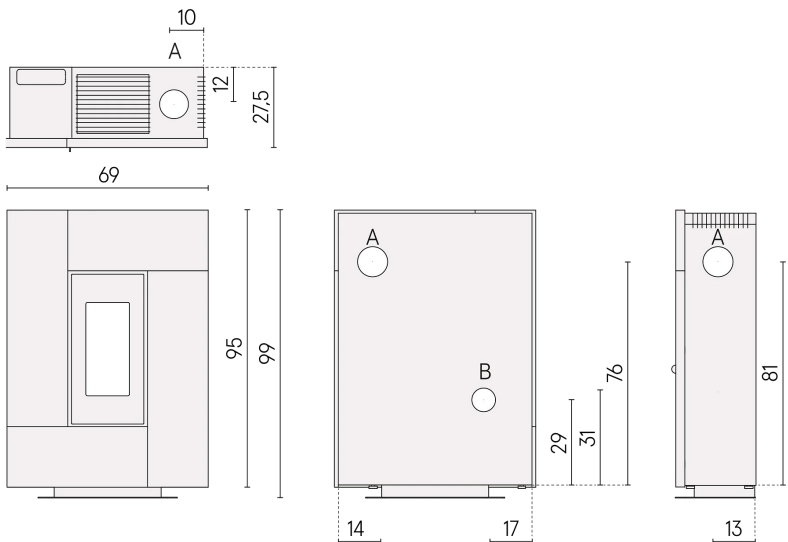

Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,5 - 6,9
Introduced thermal power (at max)	kW	7,8
Water useful power (at min-at max)	kW	- - -
Seasonal energy efficiency	η_s [%]	85
Useful efficiency (at min-at max)	%	90 - 89
Heatable volume (at min-at max)	m ³	71 - 197
CO ₂ (min-max)	%	6,4 - 12,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	295 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	2 - 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	110 - 99
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	15 - 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	12
Hourly consumption (at min-at max)	kg/h	0,6 - 1,6
Autonomy (at min-at max)	h	20 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	374
Operating electrical absorption (at max)	W	67
Chimney flue depression (at min-at max)	Pa	9 - 12
Mass of smoke (at min-at max)	g/sec	3,0 - 4,6
Exhaust fumes temperature (at min-at max)	°C	109 - 177
Distance from material comb. (back/side/under)	mm	40 / 250 / 0
Distance to material comb. (front/top)	mm	600 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0
Appliance Type (tightness)	Type	CC50

PLUS



5 stars D.M. 186



Upper exhaust



Cast iron door



Remote control (optional)



Sealed Chamber



Cast iron burning pot



Connection to the external thermostat



Comfort mode - Maximum silence



Weekly programming

AVAILABLE FINISHES

7025079		Steel Anthracite	EAN 8053859021896
7025080		Steel White	EAN 8053859021902
7025081		Steel Red Bordeaux	EAN 8053859021919
7025082		Steel Light Bronze	EAN 8053859021926
7025083		Stone Serpetino	EAN 8053859021933
7025084		Glass Black	EAN 8053859021940

OPTIONAL

5020001	90° curve kit smoke	EAN 8053859012474
5019005	Pedestal support kit	EAN 8053859010951
5019009	Wall support kit	EAN 8053859011736
5024010	Remote control with thermostat	EAN 8053859020943

CERTIFICATIONS


European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen



EN 16510-1:2022 / EN 16510-2-6:2022



STOVE PACKAGE



L (cm)	H (cm)	P (cm)
80	117	60
Volume (m ³)	0,56	
Gross weight (kg)	76.5	
Net weight (kg)	66.5	

STORAGE



MAX 2

1

N° (max)
2

TRANSPORT



66 pz