




SPIN PLUS 9 AIRTECH PS



Certificate model name: SPIN PLUS 9 T1

www.cadelsrl.com

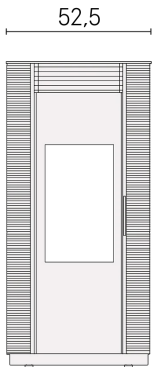

Pellet Air Plus

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,2 – 8,5
Introduced thermal power (at max)	kW	9,4
Water useful power (at min-at max)	kW	– –
Seasonal energy efficiency	ηs [%]	87
Useful efficiency (at min-at max)	%	90 – 90
Heatable volume (at min-at max)	m³	90 – 238
CO ₂ (min-max)	%	5,4– 10,7
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	163 – 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	1– 1
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	110 – 100
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	15 – 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	20
Hourly consumption (at min-at max)	kg/h	0,7 – 1,9
Autonomy (at min-at max)	h	29 – 11
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	370
Operating electrical absorption (at max)	W	110
Chimney flue depression (at min-at max)	Pa	11 – 11
Mass of smoke (at min-at max)	g/sec	3,6 – 5,3
Exhaust fumes temperature (at min-at max)	°C	121 – 216
Distance from material comb. (back/side/under)	mm	150 / 200 / 0
Distance to material comb. (front/top)	mm	500 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ductable up to	m	8
Appliance Type (tightness)	Type	CC50

PLUS

5 stars D.M. 186	Back exhaust	Go Fast – Faster pellet ignition
Airtech – Automatic brazier cleaning	UPS Ready	Duction with 1 independent motor
Remote control (optional)	Sealed Chamber	Cast iron burning pot

AVAILABLE FINISHES

7025068	Steel Light Bronze	EAN 8053859021780
7025069	Steel Titanium	EAN 8053859021797
7025070	Cast Iron Black	EAN 8053859021803

OPTIONAL

5024010	Remote control with thermostat	EAN 8053859020943
5024006	Kit ups ready	EAN 8053859020448

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 14785:2006
CE



STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	126	68
Volume (m³)	0,69	
Gross weight (kg)	110	
Net weight (kg)	100	

STORAGE

N° (max)
2
MAX 2
1

TRANSPORT

60 pz
