

PPE4.M Medium electronic LCD



4 in 1
10/11/12/15
17/18/21/24
kW

27
kW

IP25

A

2year*
warranty

Most important advantages

Electronic control

- precise and comfortable temperature regulation of water in the range of 30–60°C with a precision of 1°C

4 power levels in one water heater

- option to select maximum power (except for 27 kW model)

Remote access application

- control and monitoring of the water heater's operating parameters

Possibility of reheating preheated water

- water temperature up to 60°C on the supply
- energy and water consumption statistics."
- memory and quick switching of most frequently used temperatures

LCD display

- energy and water consumption statistics,
- display of inlet and outlet water temperature,
- display of flow rate,
- display of currently selected device power,
- maximum temperature limit setting for burn protection,
- memory for 3 most frequently used temperatures.

Easy replacement of the old heater with a new one

- specially designed PPE4 housing equipped with a unique hanger allows for easy installation of the heater in the place of the old one.



Water heaters with electronic control, LCD display, and remote control application.





Android
iOS

Applications



from 10kW from 12kW from 18kW

Dimensions

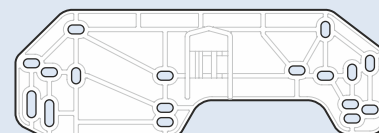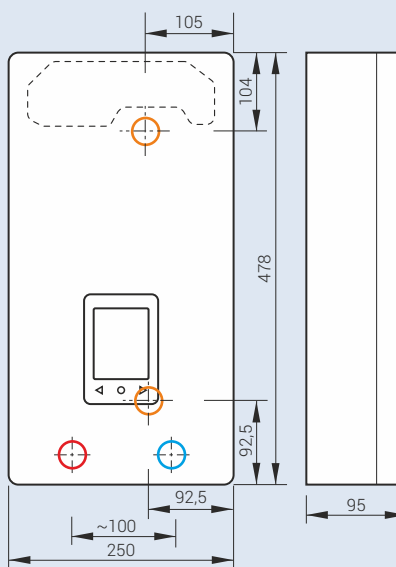

The special hanger facilitates the installation of PPE4 in the place of the old heater of any brand.

inlet and outlet section G 1/2"

- cold water inlet
- hot water inlet
- electric cable connection point

Technical data

Type	Rated power / Rated voltage	Supply water pressure (MPa)	Rated current (A)	Min. connecting wires section mm ²	Efficiency (Δt=30°) (l/min.)
PPE4.M-10/11/12/15	10/11/12/15 kW / 400V 3~	0,1 - 1,0	3x14,5/15,9/17,3/21,7	4 x 2,5	4,3/5,2/5,8/7,2
PPE4.M-17/18/21/24	17/18/21/24 kW / 400V 3~	0,1 - 1,0	3x24,7/26,0/30,3/34,6	4 x 6	8,1/8,7/10,1/11,6
PPE4.M-27	27 kW / 400V 3~	0,1 - 1,0	3x39	4 x 6	13,0