


Panasonic®

Quick Operation Guide Network Adaptor Model No. CZ-TAW1

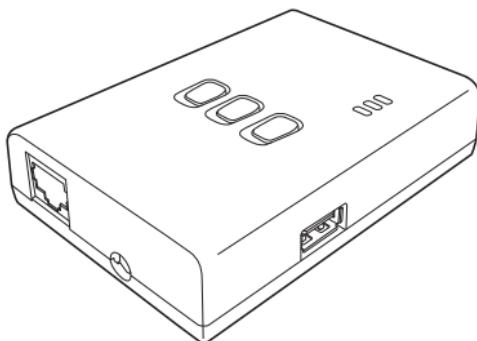

These are quick version Operating Instructions.
For full version Operating Instructions, please refer to CD-ROM.

GB	English	3
F	Français	11
I	Italiano	19
E	Español	27
D	Deutsch	35
NL	Nederlands	43
N	Norsk	51
DK	Dansk	59
S	Svenska	67
FIN	Suomi	75
CZ	Česky	83
PL	Polski	91
TR	Türkçe	99
GK	Ελληνικά	107

Quick Operation Guide

Network Adaptor

Model No. CZ-TAW1

English

Table of Contents

Safety Precautions	4
System Overview.....	5
Before Installing the Adaptor	5
Parts Identification	6
Connecting Network.....	7
Starting “AQUAREA Smart Cloud”	8

Thank you for purchasing this Panasonic product.

Please read these instructions carefully before using this product, and save this manual for future use.

These are quick version Operating Instructions.

For full version Operating Instructions, please refer to CD-ROM.

Safety Precautions

	WARNING	This indication shows the possibility of causing death or serious injury.
	CAUTION	This indication shows the possibility of causing injury or damage to properties.

The items to be followed are classified by the symbols:

	Symbol with white background denotes item that is PROHIBITED from doing.
	Symbol with dark background denotes item that must be carried out.

		WARNING
	<ul style="list-style-type: none"> Do not touch with wet hands. <ul style="list-style-type: none"> – This can cause electric shock. Do not wipe with wet cloths or wash in water. <ul style="list-style-type: none"> – This can cause electric shock or ignition. Do not disassemble or modify. <ul style="list-style-type: none"> – This can cause electric shock or ignition. → Request any repairs from the place of purchase or the installer. 	
	<ul style="list-style-type: none"> Stop use as soon as you notice any problems or malfunctions and shut off the electric supply to the AQUAREA. <ul style="list-style-type: none"> – Not doing so may cause smoke, ignition, electric shock, or burns. Examples of problems and malfunctions <ul style="list-style-type: none"> • There is a burning smell • Water or a foreign object has gotten inside → Immediately request repair from the place of purchase or the installer. Request installation from the place of purchase or an installer. <ul style="list-style-type: none"> – Not doing so may cause electric shock or ignition. 	




CAUTION



- Do not stand on an unstable surface when operating or checking the adaptor.
 - This can cause injury from falls.


System Overview

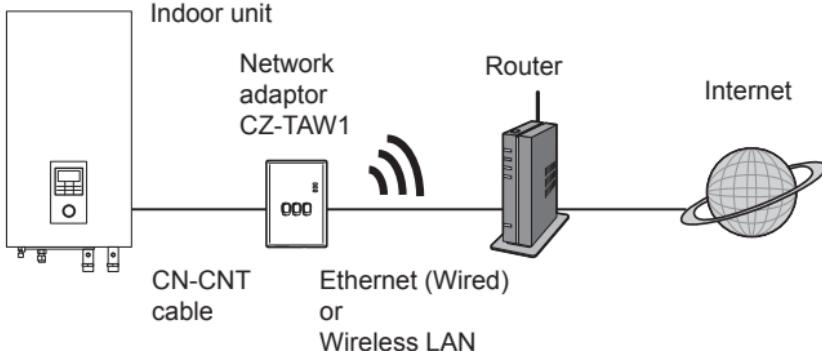

Before Installing the Adaptor

- The Network adaptor (adaptor) is designed specifically as a terminal for the Panasonic AQUAREA Smart Cloud. Panasonic AQUAREA Smart Cloud cannot be accessed with any other adaptor.
- Do not attach the adaptor to metal as wireless performance will be adversely affected. Use the wired connection if you have no alternative.
- We recommend you use Google Chrome as your Internet browser.
- Google Chrome is a registered trademark of Google Inc.

Parts Identification

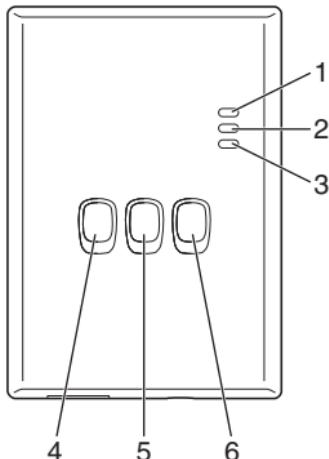

No.	Item	Description
1	Power LED	Indicates that the adaptor is being supplied with power.
2	Status LED	Indicates the status of the adaptor. Blue: Wireless mode Green: Ethernet mode Red: Abnormality White: Timer
3	Link LED	Indicates the communication status of the adaptor.
4	WPS switch	Switches WPS ON.
5	Register/Reset switch	Enables user registration and resetting.
6	Check switch	Check the communication status of the adaptor. Switches between Ethernet and Wireless modes each time it is pressed and held for 10 seconds.


Connecting Network

You can establish a connection with the internet with either the Ethernet mode (wired) or the Wireless mode (wireless).

1 Turn on the power supply to the indoor unit.

- The Power LED lights.

2 The colour of the Status LED indicates the connection mode.

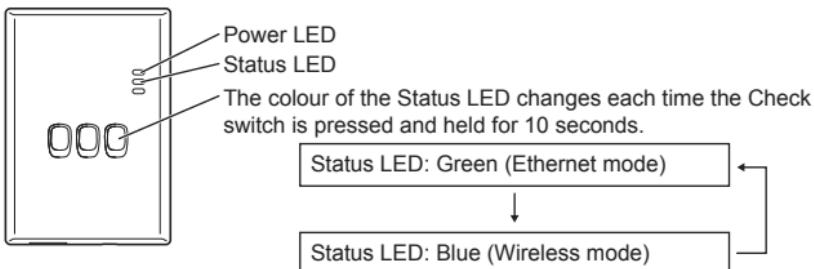

■ When connecting using the Ethernet mode (wired)

1 Check the Status LED is green to confirm that the Ethernet mode is on.

- If the Ethernet mode is not on, press and hold the Check switch for 10 seconds to switch to the Ethernet mode.

2 Connect the router and the adaptor with a LAN cable.

- The Link LED lights to indicate that the connection has been established.
- Use a shielded LAN cable.

■ When connecting using the Wireless mode (wireless)


1 Check the Status LED is blue to confirm that the Wireless mode is on.

- If the Wireless mode is not on, press and hold the Check switch for 10 seconds to switch to the Wireless mode.

2 Switch on WPS on the router.

3 Press the WPS switch on the adaptor.

- The Status LED and Link LED light when communication is established.



Starting “AQUAREA Smart Cloud”

Use a smartphone to set up the AQUAREA Smart Cloud.

- User interface image may change without notification.

1 Access the “AQUAREA Smart Cloud”.

<https://aquarea-smart.panasonic.com>



AQUAREA Smart Cloud

Login

Please enter your Panasonic ID and password.

Remember me

[Login](#)

[Forgot your ID/Password](#)

[Panasonic ID sign up](#)

AQUAREA Smart Cloud

Device Password Settings

To complete the registration of the device, you need to set ID and your password for this device. Please input device ID and register your device password consisting of 4-15 characters and/or numbers.

Device ID:

Device password:


[Register](#)

- There is no charge for using this application. Other charges may be incurred for connection and operation, however.
- Updates to the service may mean there are changes to the design of the screen and display.
- You will need a Panasonic ID in order to use the application. If you have not yet registered, first obtain a register for a Panasonic ID (free) by either following the link on the login page or at the following URL.

<https://csapl.pcpf.panasonic.com/m>


2 Register both the adaptor and the indoor unit.

- Press the Register/Reset switch on the adaptor to enter the user registration mode. (The mode remains active for 30 minutes.)



Register/Reset switch

- Log into the service using the Panasonic ID you have already obtained.
- Enter the Device ID which is written on the side of the adaptor.
 - Skip the letter “-” when entering the Device ID.

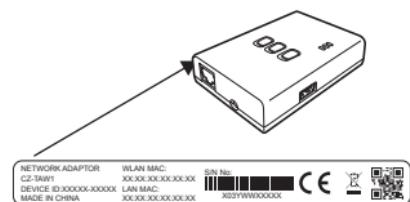

AQUAREA Smart Cloud

Device Password Settings

To complete the registration of the device, you need to set ID and your password for this device. Please input device ID and register your device password consisting of 4-15 characters and/or numbers.

Device ID:

Device password:

[Register](#)

4) Enter a password for the device.

- If you forget the password for the device, you can reset the adaptor and then re-register it.
- You can give a name and zone name to the indoor unit that helps you identify it.



3 Use the AQUAREA Smart Cloud.



■ To register an additional user on the indoor unit

Multiple users (family members, for example) with different Panasonic IDs can access the same indoor unit.

1 Additional user operations

- 1) Log into the service using the Panasonic ID of the additional user.
- 2) Enter the Device ID and Device password that was registered by the owner (the user that initially registered).
- 3) Enter a message requesting approval from the owner.
 - Enter a message so that the owner can identify the person making the request.




2 Owner (the user that initially registered) operations

- 1) Log into the service using the Panasonic ID of the owner (the user that initially registered).
 - If there is a message requesting registration from an additional user, a "①" is displayed at the top left of the Top page.
- 2) Select "①".
 - The request message from the additional user is displayed.

3) Select the appropriate privileges for the user and approve their request.

- After approving, the additional user will also be able to use the AQUAREA Smart Cloud.

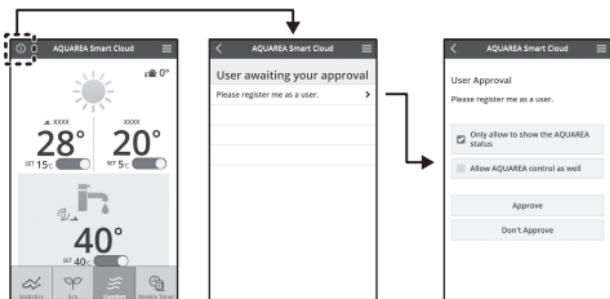

Declaration of Conformity (DoC)

Hereby, "Panasonic Corporation" declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

The full text of the EU declaration of conformity is available at the following internet address: <http://www.ptc.panasonic.eu/>

Authorized Representative: Panasonic Testing Centre, Panasonic Marketing Europe GmbH, Winsbergring 15, 22525 Hamburg, Germany
 Norway: There are usage restrictions within a radius of 20 km from the centre of Ny-Alesund on Svalbard.



Disposal of Old Equipment

Only for European Union and countries with recycling systems

This symbol on the products, packaging, and/or accompanying documents means that used electrical and electronic products must not be mixed with general household waste.

For proper treatment, recovery and recycling of old products, please take them to applicable collection points in accordance with your national legislation.

By disposing of them correctly, you will help to save valuable resources and prevent any potential negative effects on human health and the environment.

For more information about collection and recycling, please contact your local municipality.

Penalties may be applicable for incorrect disposal of this waste, in accordance with national legislation.