

USER MANUAL

Pellet Stove



©2026 CADEL srl | All rights reserved - Tutti i diritti riservati

DUNE - SPIN - EOS - CRISTAL

SUMMARY

1	MANUAL SIMBOLOGY.....	3
2	DEAR CUSTOMER	3
2.1	REVISIONS TO THE PUBLICATION	4
2.2	CARE OF THE MANUAL AND HOW TO CONSULT IT...4	
3	SAFETY REQUIREMENTS	5
4	CAUTIONS - WARRANTY CONDITIONS.....	6
4.1	INFORMATION.....	6
4.2	INTENDED USE	7
4.3	PRODUCT PERFORMANCE CHECKS.....	7
4.4	WARRANTY CONDITIONS	7
5	SPARE PARTS	7
6	DISPOSAL OF MATERIALS	7
6.1	WARNINGS FOR THE CORRECT DISPOSAL OF THE PRODUCT	7
6.2	INFORMATION FOR MANAGEMENT OF ELECTRIC AND ELECTRONIC APPLIANCE WASTE CONTAINING BATTERIES OR ACCUMULATORS	9
6.3	INSTRUCTIONS FOR PACKAGING DISPOSAL	9
7	WIFI - BLUETOOTH CONNECTION	10
7.1	EASY CONNECT PLUS.....	10
8	USE	11
8.1	INTRODUCTION	11
8.2	CONTROL PANEL DISPLAY	12
8.3	MAIN MENU	12
8.4	SETTINGS MENU.....	12
8.5	INFO MENU	15
8.6	IGNITION OF THE STOVE.....	15
8.7	FAILED IGNITION	15
8.8	SWITCH OFF (ON PANEL: OFF WITH FLASHING FLAME)	16
8.9	POWER FAILURE.....	16
8.10	POWER FAILURE WITH UPS ACTIVE (ONLY IF THE STOVE IS PRESET)	16
8.11	ADJUSTMENTS MENU	16
8.12	PROGRAMMED MODE (TIMER) - MAIN MENU	17
8.13	PROGRAMMING EXAMPLES:.....	18
8.14	NOTES FOR TIMER OPERATION	18
8.15	AUTO ECO MODE.....	18
8.16	SLEEP FUNCTION (MAIN MENU)	19
8.17	EASY SET FEATURE	19
8.18	PELLETS RECIPE	20
8.19	SMOKE RPM VARIATION.....	20
8.20	UPS	20
8.21	CHIMNEY SWEEP FUNCTION (FOR MAINTENANCE TECHNICIANS ONLY)	21
9	FUEL.....	21
9.1	FUEL	21
9.2	PELLET SUPPLY	22
9.3	PELLET REFUELLING TIMER.....	22
10	VENTILATION	22
11	REMOTE CONTROL (OPTIONAL).....	23
12	REMOTE CONTROL WITH THERMOSTAT (OPTIONAL).....	24
13	SAFETY DEVICES AND ALARMS	25
13.1	PRESSURE SWITCH.....	25
13.2	SMOKE TEMPERATURE PROBE	25
13.3	CONTACT THERMOSTAT IN THE FUEL HOPPER.....	25
13.4	ELECTRICAL SAFETY.....	25
13.5	SMOKE FAN	25
13.6	GEAR MOTOR.....	25
13.7	TEMPORARY POWER CUT.....	25
13.8	FAILED START-UP	25
13.9	BLACKOUT WITH THE BOILER ON	25
13.10	ALARM ALERTS	25
13.11	ALARM RESET	26
13.12	CLEANER	26
14	ROUTINE MAINTENANCE	26
14.1	INTRODUCTION	26
14.2	BEFORE EACH START-UP	27
14.3	BURNING POT AND ASH TRAY CLEANING	27
14.4	SELF-CLEANING BRAZIER CLEANING	28
14.5	CATALYTIC FILTER.....	29
14.6	HOPPER CLEANING	30
14.7	FUME PIPES ANNUAL CLEANING	30
14.8	GENERAL CLEANING.....	30
14.9	CLEANING OF PAINTED METAL PANELS	30
14.10	CLEANING OF CERAMIC AND STONE PANELS	30
14.11	GASKET REPLACEMENT.....	30
14.12	GLASS CLEANING	30
14.13	SHUTDOWN (END OF SEASON)	30
14.14	CHECKING THE INNER COMPONENTS	31
15	IN CASE OF ANOMALY.....	32
15.1	PROBLEM SOLVING	32
16	TECHNICAL FEATURES.....	35
17	TECHNICAL DOCUMENTATION FOR LOCAL SPACE HEATERS ACCORDING TO COMMISSION REGULATIONS (EU) 2015/1185 - (EU) 2015/1186 (PRODUCT FICHE)	41

1 MANUAL SIMBOLOGY

	USER
	PLEASE READ AND FOLLOW THE INSTRUCTIONS FOR USE CAREFULLY
	AUTHORISED TECHNICIAN (ONLY to interpret or the Stove-manufacturer or the Authorized Technician of Technical Assistance Service approved by the Stove-manufacturer)
	SPECIALIZED STOVE-REPAIRER
	CAUTION: READ CAREFULLY THE NOTE
	CAUTION: DANGER OR IRREVERSIBLE DAMAGE POSSIBILITY

- The icons with the stylized figures indicates whom the subject dealt in the paragraph is addressed to (between the User and/or the Authorized Technician and/or the Specialized Stove-repairer).
- **WARNING symbols indicates an important note.**
- The User manual is an integral and complementary part of the installer manual.

2 DEAR CUSTOMER

Dear Customer,

Our products are designed and manufactured in accordance with standards in force, with high quality materials and using our extensive experience in the transformation processes.

To get the best performance, we suggest you read the instructions in this manual carefully.

This installation guide is an integral part of the product: ensure that the manual is always supplied with the appliance, even if it changes owner. If the manual is lost, you can request another copy from the local Technical Dept. or download it directly from the company's website.

All local regulations, including those referring to national and European standards, must be observed when installing the appliance.

In Italy, for the installation of systems with a biomass below 35KW, refer to the Ministerial Decree 37/08 and the qualified installation technician with the suitable requirements must issue a certificate of compliance for the system installed. (By system we intend Stove+Flue+Air inlet).

Our solid bio-combustible products, (hereinafter called "Products") are designed and manufactured in compliance with one of the following European standard harmonised to Regulation (UE) no. 305/2011 for construction products:

EN 16510-1:2022 / EN 16510-2-6:2022 : "Residential space heating appliances mechanically fired by wood pellets".

The products also comply with the essential requirements of Directive **2009/125/EC (Eco Design)** and, where applicable, Directives:

2014/35/EU (LVD - Low Voltage directive)

2014/30/EU (EMC - Electromagnetic Compatibility directive)

2014/53/EU (RED - Radio Equipment directive)

2011/65/EU (ROHS)

Hereby CADEL S.r.l. declares that the radio equipment type **Easy Connect Plus + Navel Stand Alone** is in compliance with Directive 2014/53/EU.

According to (EU) No. 305/2011 regulation, the "Declaration of Performance" and "Declaration of Conformity" are available online, in the download area, at the web sites:

- www.cadelsrl.com
- www.free-point.it
- www.pegasoheating.com

Having specified the above, we highlight and report that:

- **This manual and technical data sheet, also available on our website**, bear all of the specific indications and necessary and essential information to choose the product, to install it correctly and to properly size the smoke expulsion system;
- the Products must be **installed, controlled and serviced** by a qualified operator, according to the instructions in this manual and in compliance with the laws and installation and maintenance standards in force in individual countries, so as to provide an efficient heating system, properly sized according to the needs of the home.
- **If the Products are thermally stressed**, constantly operating for several hours at high power (e.g. 3, 4 hours a day at outputs P4 or P5), we recommend more frequent cleaning and reducing the interval between routine maintenance operations according to the operating condition of the product. We furthermore point out that these operating conditions increase the risk of premature wear of the product, especially those parts exposed to the direct heat of the fire (e.g. combustion chamber), the original condition of which can undergo modifications and deterioration which, among other things, could generate noise during operation of the unit due to mechanical expansion.

The manufacturer will not be held liable if the above information is ignored.

2.1 REVISIONS TO THE PUBLICATION

The content of this manual is strictly technical and the property of CADEL S.r.l.

No part of this manual may be translated into other languages, adapted and/or reproduced, even in part, in other mechanical and/or electronic form or media, for photocopies, recordings or other, without the prior written authorisation of CADEL S.r.l.

The company reserves the right to make changes to the product at any time without prior notice. The owner company reserves its rights according to law.

2.2 CARE OF THE MANUAL AND HOW TO CONSULT IT

- Take care of this manual and store it in an easily and quickly accessible place.
- Should this manual be lost or destroyed, request a copy from your retailer or directly from the authorised Technical assistance department. It can also be downloaded from the company's website.
- **"Bold text"** requires special attention.



- Installation, electrical connection, functional verification and maintenance must only be performed by qualified or authorised personnel.
- Live electrical parts: disconnect the product from the 230V power supply before performing any maintenance operation. Only power the product after completing assembly.
- Special maintenance must only be performed by authorised and qualified personnel.
- All local regulations, including those referring to national European standards, must be respected during appliance installation.
- The manufacturer declines any responsibility in case of installation which are not in compliance with current regulations, in case of a wrong room ventilation system, in case of an electric connection which is not in compliance with regulations and in case of a wrong use of the appliance.
- It is forbidden to install the stove in bedrooms, bathrooms and in rooms used for storing combustible materials and in one-room flats.
- The installation in one-room flats is allowed if they are in sealed chamber.
- In any case the stove must not be installed in rooms where it can get in touch with water or water splashes because this can cause burn hazards and short-circuit.
- Please check that the floor has an adequate load capacity. If the existing one does not satisfy this requirement, appropriate measure should be provided (for example a plate for distributing the load).
- For safety fire regulations the distances from flammable or sensible to heat objects (sofas, pieces of furniture, wooden covering, etc...) must be respected.
- If there are highly flammable objects (curtains, fitted carpet, etc...), all these distances must be further increased with 1 meter.
- If the floor is made of combustible material, we recommend using a protector made of incombustible material (steel, glass, etc.) that also protects the front part from any falling burnt particles during cleaning.
- The electrical cable must not get in touch with the fume exhaust pipe and nor with every other part of the stove.
- The user, or whoever is operating the product, must read and fully understand the contents of this installation and use guide before performing any operation. Errors or incorrect settings can cause hazardous conditions and/or poor operation.
- The type of fuel to use is only the pellets.
- Do not use the appliance as waste incinerator.
- Do not place laundry on the product to dry. Any clothes horses or similar objects must be kept at a safe distance from the product. Fire hazard.
- It is forbidden to operate the product with the door open or the glass broken.
- It is forbidden to modify the appliance without authorization.
- Do not use flammable liquids during the ignition (alcohol, petrol, oil, etc...).
- After a failed ignition the burning pot must be empty from the amassed pellets, before starting the stove up again.
- The pellet hopper must always be closed with its own lid.
- Before of every intervention leave the fire completely extinguish till the coo-

ling and always disconnect the plug from the electric socket.

- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.
- Packaging are not toys and could cause suffocation or strangulation and other health hazards! People (children included) with reduced mobility, psychological diseases or without experience and knowledge must be kept away from packaging. The stove **IS NOT** a toy.
- Children must be constantly overseen in order to assure that they do not play with the appliance.
- During its running, the stove reaches high temperatures: keep away children and animals and for your safety please use appropriate fireproof devices, such as heat-protecting gloves.
- The stove is equipped with a safety device that stops the feed screw immediately when the pellet loading door is opened. This safety device (standard EN 60335-2-102) prevents the user from coming into contact with the moving parts of the appliance.
- The chimney flue must be cleaned, since the soot and unburnt oil deposits reduce its section so blocking the draught. In great quantities they can flare up.
- If the pellets are of bad quality (if contains sizing agents, oils, varnishes, plastic remains or if it is mealy), deposits will form along pellets drop pipe during the running. When the stove is switched off, these remains could form little hot coals that rising along the pipe could reach the pellets on the hopper burning them and creating a thick and harmful smoke inside the room. Please always keep the hopper closed with its own lid. If the pipe is sooty, please clean it.
- In case it would be necessary to extinguish the fire emitted by the stove or by the chimney flue, use a fire-extinguisher or contact the firemen. **DO NOT** use water to extinguish the fire inside the burning pot.
- Remote control (if present): keep the batteries out of the reach of children, risk of swallowing. If swallowed, seek medical advice immediately.
- Pellets must not be fed manually into the burner - this wrong behaviour can generate an abnormal amount of unburned gas, with a risk of explosion in the chamber.

4 CAUTIONS - WARRANTY CONDITIONS

4.1 INFORMATION

- Please contact the retailer or qualified personnel for any information, problem or malfunction.
- Only use the fuel specified by the manufacturer.
- When the product is switched on for the first time, it is normal for it to emit smoke due to the paint heating up for the first time. Therefore make sure the room it is installed in is well-ventilated.
- Periodically check and empty the inspectionable parts of the smoke duct (e.g. Tee fitting caps)
- Have the smoke outlet system periodically checked and cleaned
- The product is not a cooking appliance.
- Always keep the cover of the fuel hopper closed.

- Store this installation and user manual with care as it must accompany the product for the duration of its useful life. If the product is sold or transferred to another user, always ensure the manual is also handed over.

4.2 INTENDED USE

The product only works with wood pellets and must be installed inside a room.

4.3 PRODUCT PERFORMANCE CHECKS.

All our products undergo ITT TESTS carried out by a notified third party laboratory (system 3) and in accordance with Regulation (EU) number 305/2011 "Construction products", according to standard EN 14785:2006/16510-2-6:2022 for household appliances and "Machinery Directive" EN 303-5 for boilers.

In the case of tests for any market surveillance or inspections by third parties, please consider the following warnings:

- To reach the declared performance levels, the product must perform an operating cycle of at least 6/8 hours beforehand.
- Set the average draught of the combustion fumes as specified in the "technical product features" table
- The type of pellets used must comply with the current EN ISO 17225-2 class A1 regulation. Fir pellets are usually used for certification.
- The amount of thermal energy can vary according to the length and calorific value of the fuel. This may require some adjustments (accessed from the user menu) to comply with the hourly consumption specified in the "technical product features" table. Using class A1 pellets guarantees a calorific value that is likely to be close to that used in the product certification; the size of the pellet grains can significantly affect hourly fuel loading and consequently performance; it is therefore suggested to use pellets with a 6 mm diameter and an average length of around 24 mm (avoid pellets that are too long or excessively crushed).
- With wood-burning appliances, the fuel must comply with the current EN ISO 17225-5 class A1 regulation. Check the correct moisture of the fuel, as it must be within the range of 12 - 20% (it is best if the moisture is close to 12%, as is normally used in certification). As the fuel moisture increases, different combustion air settings are required, which are implemented from the combustion air register, thereby modifying the mixture of primary and secondary air
- It is important to check the operation of devices that can affect performance (for example air fans or electric safety devices) in case of damage due to handling.
- Nominal performance has been obtained by setting the maximum flame power and room ventilation in **automatic mode**.

4.4 WARRANTY CONDITIONS

For the duration, terms, conditions, limitations of the Cadel S.r.l. conventional warranty, please refer to the specific warranty card that is included with the product.

5 SPARE PARTS

For each repair or adjustment which should be necessary, please contact the dealer where you purchased your stove or your nearest Technical Assistance Service, specifying:

- Appliance model
- Serial number
- Type of problem

Use only original spare parts which you can find at our Technical Assistance Services.

6 DISPOSAL OF MATERIALS

6.1 WARNINGS FOR THE CORRECT DISPOSAL OF THE PRODUCT

The owner is the sole party responsible for demolishing and disposing of the product. This must be performed in compliance with laws related to safety and environmental protection in force in his/her country.

At the end of its working life, the product must not be disposed of as urban waste.

It must be taken to a special differentiated waste collection centre set up by the local authorities or to a retailer that provides this service. Separating and recycling prevents potential negative effects on the environment and health (often caused by inappropriately disposing of product parts). It also allows materials to be recovered in order to obtain significant savings in energy and resources.

The following table and the exploded view it refers to highlight the main components that can be found in the device and indications on how to separate and dispose of them correctly when no longer used.

More specifically, the electric and electronic components must be separated and disposed of in authorised centres, in compliance with the WEEE directive 2012/19/EU and the relative national transpositions.

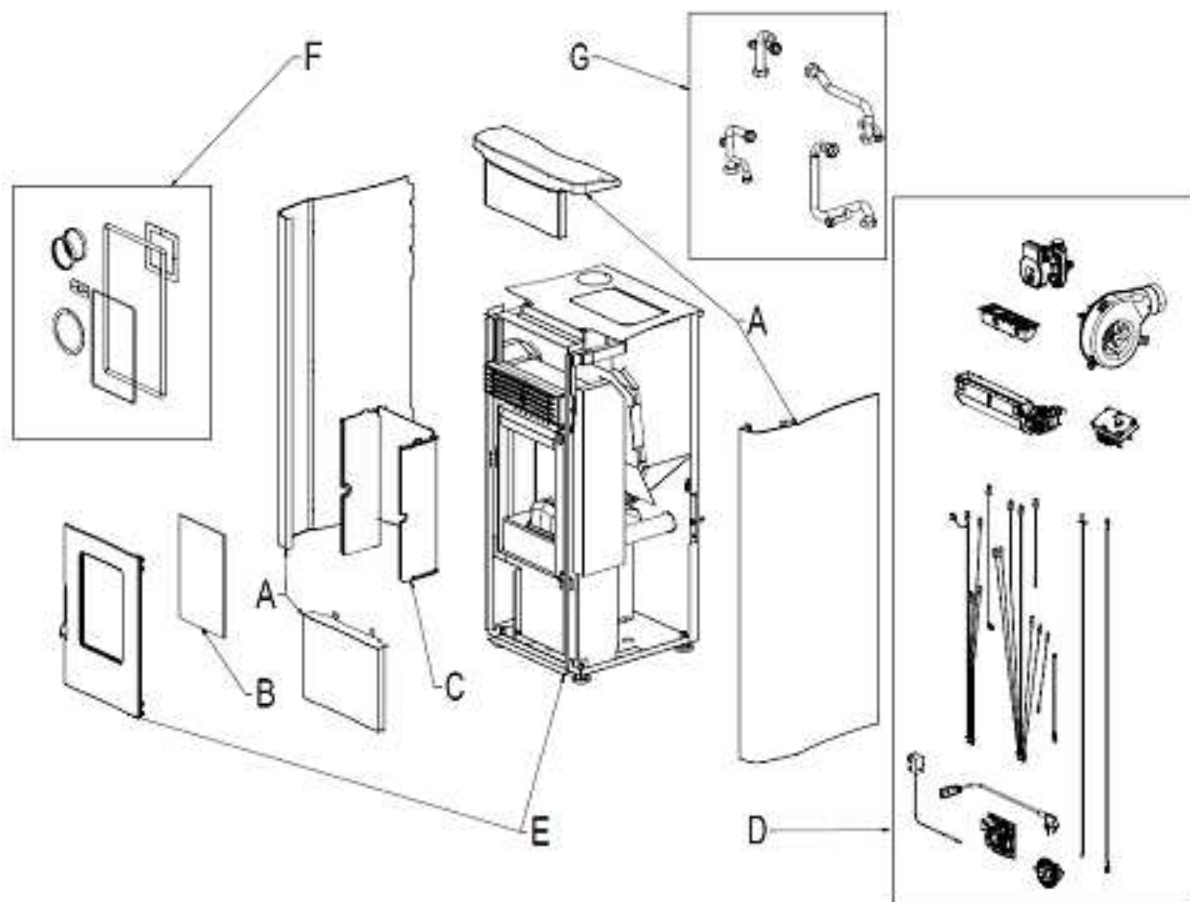


Fig. 1 - Exploded drawing

LEGENDA	WHERE TO DISPOSE	MATERIALS
A. OUTER CLADDING	If there is any, to be disposed of separately based on the material used:	Metal
		Glass
		Tiles or ceramics
		Stone
B. GLASS DOORS	If there is any, to be disposed of separately based on the material used:	Glass ceramic (fire door): to be disposed of with inert or mixed waste
		Tempered glass (oven door): to be disposed of with glass
C. INTERIOR CLADDING	If there is any, to be disposed of separately based on the material used:	Metal
		Refractory materials
		Insulating panels
		Vermiculite
D. ELECTRIC AND ELECTRONIC COMPONENTS	To be disposed of separately in authorised centres, as indicated in the WEEE directive 2012/19/EU and the relative national transposition.	Wiring, motors, fans, circulators, display panels, sensors ignition plug, electronic cards, batteries.
E. METAL STRUCTURE	To be disposed of separately with metal	-
F. COMPONENTS THAT CANNOT BE RECYCLED	To be disposed of with mixed waste	E.G.: Gaskets, rube piping, silicone or fibres, plastic.
G. HYDRAULIC COMPONENTS	Piping, fittings, expansion vessel, valves. If there are any, to be disposed of separately based on the material they are made of:	Copper
		Brass
		Stainless steel
		Other materials

6.2 INFORMATION FOR MANAGEMENT OF ELECTRIC AND ELECTRONIC APPLIANCE WASTE CONTAINING BATTERIES OR ACCUMULATORS



Fig. 2 - Waste disposal

This symbol, which is used on the product, batteries, accumulators or on the packaging or documents, means that at the end of its useful life, this product, the batteries and the accumulators included must not be collected, recycled or disposed of together with domestic waste.

Improper management of electric or electronic waste or batteries or accumulators can lead to the leakage of hazardous substances contained in the product. For the purpose of preventing damage to health or the environment, users are kindly asked to separate this equipment and/or batteries or accumulators included from other types of waste and to arrange for disposal by the municipal waste service. It is possible to ask your local dealer to collect the waste electric or electronic appliance under the conditions and following the methods provided by national laws transposing the Directive WEEE 2012/19/EU.

Separate waste collection and recycling of unused electric and electronic equipment, batteries and accumulators helps to save natural resources and to guarantee that this waste is processed in a manner that is safe for health and the environment.

For more information about how to collect electric and electronic equipment and appliances, batteries and accumulators, please contact your local Council or Public Authority competent to issue the relevant permits.

6.3 INSTRUCTIONS FOR PACKAGING DISPOSAL

The material that the appliance's packaging is made of must be managed correctly, in order to make collection, reuse, recovery and recycling easier, where possible.

The table below illustrates the possible components that the packaging is made of, and the relative instructions for correct disposal.

DESCRIPTION	CODE MATERIAL	SYMBOL	DIRECTIONS FOR COLLECTION
- WOOD BED - WOOD CAGE - WOOD PALLET	WOOD FOR 50		SORTED waste collection
			WOOD
			Check with the competent body on how to dispose of this packaging at the recycling depot
- CARDBOARD BOX - CARDBOARD CORNER - CARDBOARD SHEET	CORRUGATED CARDBOARD PAP 20		SORTED waste collection
			PAPER
			Check the instructions of the competent body
- CARDBOARD CORNER	NOT CORRUGATED CARDBOARD PAP 21		SORTED waste collection
			PAPER
			Check the instructions of the competent body
- LABELS - INSTRUCTION MANUAL	PAPER PAP 22		SORTED waste collection
			PAPER
			Check the instructions of the competent body

DESCRIPTION	CODE MATERIAL	SYMBOL	DIRECTIONS FOR COLLECTION
- APPLIANCE BAG	POLYETHYLENE HD-PE 2		SORTED waste collection PLASTIC Check the instructions of the competent body
- APPLIANCE BAG - BAG OF ACCESSORIES - BUBBLE WRAP - PROTECTIVE SHEET - LABELS	POLYETHYLENE LD PE 04		SORTED waste collection PLASTIC Check the instructions of the competent body
- POLYSTYRENE - FOAM PEANUTS	POLYSTYRENE PS 6		SORTED waste collection PLASTIC Check the instructions of the competent body
- STRAP - TAPE	POLYPROPYLENE PP 5		SORTED waste collection PLASTIC Check the instructions of the competent body.
- SCREWS - STAPLES FOR STRAP - FASTENING BRACKET	IRON FE 40		SORTED waste collection METAL Check with the competent body on how to dispose of this packaging at the recycling depot

7 WIFI - BLUETOOTH CONNECTION

7.1 EASY CONNECT PLUS



Procedure if only valid for models with EASY CONNECT PLUS Wi-Fi technology.

CATEGORIES	ITEMS	SPECIFICATIONS
Wi-Fi	Protocols	802.11 b/g/n (802.11n up to 150 Mbps) A-MPDU and A-MSDU aggregation and 0.4 µs guard interval support
	Frequency range	2412 ~ 2484 MHz
Bluetooth (BLE)	Protocols	Bluetooth v4.2 BR/EDR and BLE specification
	Radio	NZIF receiver with -97 dBm sensitivity Class-1, class-2 and class-3 transmitter AFH
	Audio	CVSD and SBC





Fig. 3 - EASY CONNECT PLUS module



Fig. 4 - EASY CONNECT PLUS display



Fig. 5 - EASY CONNECT PLUS app

The documentation for connecting the Wi-Fi and using the App are available online at the following addresses:

	https://www.cadelsrl.com/download-wi-fi/
	http://www.free-point.it/it/downloads/
	https://www.pegasoheating.com/it/documenti/

8 USE

8.1 INTRODUCTION

To have the best performance with the lowest consumption please follow the here described instructions.

- The lighting of the pellets occurs very easily if the installation is correct and if the chimney flue is efficient.
- **Switch on the stove at Power 5**, for at least 2 hours, in order to enable the materials which make up the boiler and the fireplace to adjust the inner springing stress. After 2 hours, the smell of paint and smoke will disappear.

WARNING The paint inside the combustion chamber is not covered by warranty. Any alteration, discoloration, peeling, or wear is to be considered normal, as no paint can withstand high temperatures and direct contact with the flame.



Oily plant waste and lacquers can cause smells and smoke during the first working hours: it is advisable to ventilate the room because they could be noxious to people and animals.



Set values from 1 to 5 are defined by the manufacturer and they can be changed only by an authorized technician.



The product will be subject to expansion and contraction during the ignition and cooling stages, therefore slight creaking noises may be heard. This is perfectly normal as the structure is made of laminated steel and must not be considered a defect.

8.2 CONTROL PANEL DISPLAY

Menu items.

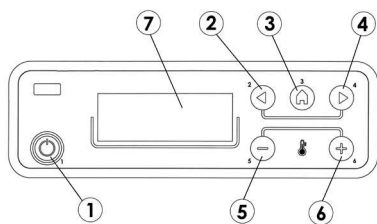


Fig. 6 - Control panel

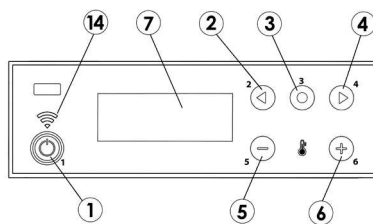


Fig. 7 - Control panel (wi-fi)

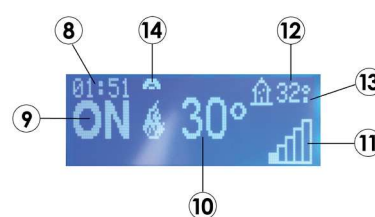


Fig. 8 - Display

LEGEND	Fig. 6 Fig. 7 Fig. 8
1	Boiler lighting/shutdown (ESC)
2	Scrolling of programming menu to decrease
3	Menu
4	Scrolling of programming menu to increase
5	Decrease set temperature/programming functions
6	Increase set temperature/programming functions
7	Display
8	Time
9	Status
10	Temperature set by user
11	Instant power
12	Ambient temperature
13	If there is "°" = 0.5 °C (29.° = 29.5°)
14	Wi-Fi connection (optional - see dedicated manual)

8.3 MAIN MENU

It is accessed by pressing key 3 (menu). The items that are accessed are:

- Time and Date
- Timer
- Sleep (only with the stove on)
- Settings
- Info

Date and time setting

To set the date and time act as follows:

- Press the “menu” button.
- Select “Time and Date”.
- Select by pressing “menu”
- Scroll with the arrows and select the variables to be modified one at a time: Day, Hours, Minutes, Day number, Month, Year.
- Select “menu” to confirm.
- Modify with the + - keys.
- Finally press “menu” to confirm and “esc” to exit.

Timer setting (see relative chapter)

Sleep setting (see relative chapter)

8.4 SETTINGS MENU

The SETTINGS menu allows to act on the boiler operating mode:

a - Language

Aa - UPS (only displayed if the stove is set-up)

b - Cleaning (displayed only when the boiler is switched off)

c - Screw Loading (displayed only when the boiler is switched off)

d - Tone

e - Ext.Thermostat (activation)

f - Auto-Eco (activation)
g - Off Time Eco (default 5 minutes)
x - Easy Set
h - Pellet Recipe
i - Smoke Fan rpm
j - Components Test (displayed only when the boiler is switched off)
k - Chimney Sweep Function (activated only when the boiler is switched on, for field emissions test)
l - Technical Menu

a - Language

To select the language act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to "Language" using the arrows.
- Press "menu" to confirm.
- With the + - keys select the language of interest (IT/EN/DE/FR/ES/NL/PL/DA/SL)
- Press "menu" to confirm and "esc" to exit.

Aa - UPS

To activate the 'UPS' function (can only be activated if the stove is set-up), proceed as follows:

- Press the "menu" key.
- Use the arrows to scroll and select "Settings".
- Press "menu" to confirm.
- Use the arrows to scroll and select "UPS".
- Press "menu" to confirm.
- Use the + - keys to select the minutes for keeping the stove lit.
- Press "menu" to confirm and "esc" to exit.

b - Cleaning

To select "Cleaning" (only when the boiler is switched off) act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to "Cleaning" using the arrows.
- Press "menu" to confirm.
- Select "On" with the + - keys.
- Press "menu" to confirm and "esc" to exit.

c - Screw Loading

To select "Screw loading" (only when the boiler is switched off) act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to "Screw loading" using the arrows.
- Press "menu" to confirm.
- Select "Enabled" with the + - keys.
- Press "menu" to confirm and "esc" to exit.

d - Tone

This function is disabled by default, so to enable act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to "Tone" using the arrows.
- Press "menu" to confirm.
- Select "On" with the + - keys.
- Press "menu" to confirm and "esc" to exit.

e - Ext.Thermostat (see relative chapter)

f - Auto-Eco activation

To select the Auto-Eco function act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to "Auto-Eco activation" using the arrows.
- Press "menu" to confirm.
- Select "On" with the + - keys.
- Press "menu" to confirm and "esc" to exit.

g - Off Time Eco

To select the Off Time Eco function act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to "Off Time Eco" using the arrows.
- Press "menu" to confirm.
- Enter the minutes with the + - keys.
- Press "menu" to confirm and "esc" to exit.

x - Easy Set

To select the "Easy Set" function act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to "Easy Set" using the arrows.
- Press "menu" to confirm.
- With the + - keys select "Easy Set" of interest (SET1 - SET2 - SET3 - SET4)
- Press "menu" to confirm and "esc" to exit.

h - Pellet Recipe

To change the recipe act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to "Pellet Recipe" using the arrows.
- Press "menu" to confirm.
- Modify the % with the + - keys.
- Press "menu" to confirm and "esc" to exit

i - Smoke Fan rpm

To change the parameter act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to "Smoke Fan rpm" using the arrows.
- Press "menu" to confirm.
- Modify the % with the + - keys.
- Press "menu" to confirm and "esc" to exit

j - Components Test

To activate the "Components Test" function (only when the boiler is switched off) act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to "Components Test" using the arrows.

- Press "menu" to confirm.
- Select the test to be performed with the + - keys
- Press "menu" to confirm and "esc" to exit

k - "Chimney Sweep Function"

To activate the "Chimney Sweep Function" function act as follows:

- Press the "menu" button.
- Scroll to "Settings" using the arrows
- Press "menu" to confirm.
- Scroll to the "Chimney Sweep Function" function using the arrows.
- Press "menu" to confirm.
- Select "On" with the + - keys (Off by default)
- Press "menu" to confirm and "esc" to exit

l - Technical Menu

To access the technical menu one must contact an assistance centre as one needs a password to enter.

8.5 INFO MENU

- Product Type
- Firmware Version
- Software info
- Total hrs.
- Ignition N.
- Rpm Smoke Fan
- Smoke Temp.
- Air Fan Voltage
- Screw Loading
- Fire

8.6 IGNITION OF THE STOVE

We remind you that the first ignition must be carried out by a specialized and authorized technician who will check that all is installed in compliance with current regulations and checks the efficiency.

- If inside the combustion chamber there are booklets, manuals, etc..., remove them.
- Check if the door is correctly closed.
- Check if the stove is correctly inserted in the electric socket.
- Before switching the stove on, assure you the burning pot is clean.
- To start the stove, keep the P1 button pressed until the ON sign and a flashing flame to its side appear. The ignition resistance pre-heating starts. After some seconds the feed screw loads pellets and the resistance pre-heating continues. When the temperature is high enough (after about 5-8 minutes), ignition is considered to be completed.
- Once the ignition step is complete, the stove moves into operating mode and shows the selected heat output, the ambient temperature and the **big flame** (see Fig. 9).
- If the ambient temperature value exceeds the limit set on the button panel in the temperature set, the heat output is brought to its lowest value and the **small flame** is shown (see Fig. 10). When the ambient temperature decreases below the set temperature, the stove goes back to the set output.



Fig. 9 - Big flame

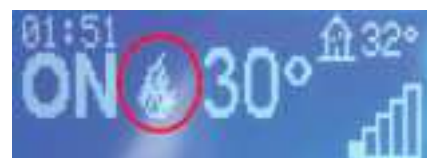


Fig. 10 - Small flame

8.7 FAILED IGNITION

If pellets should not ignite, the lack of ignition will be signalled by the A01 "No Ignition" warning.

If the ambient temperature is below 5°C, the resistance may not heat up enough to guarantee the pellet ignition. In this case, remove the unburned pellets from the burning pot and restart ignition.

Too much pellets in the burning pot, or humid pellet, or sooty burning pot make ignition difficult and create dense white smoke which is harmful to health and can cause explosions on the combustion chamber. It is therefore necessary not to stand in front of

the stove during ignition stage if dense white smoke is present.



If after some months the flame appears weak and/or orange colored or the glass tends to blackens and the burning pot to become encrusted, clean the stove, clean the fume conduit and the chimney flue.



ATTENTION!

Make sure pellets and ash have not accumulated in the brazier due to failed ignition. If the brazier is not cleaned before reattempting, there is the risk of further failed ignitions and even explosions in some cases.

8.8 SWITCH OFF (ON PANEL: OFF WITH FLASHING FLAME)

If the shutdown key is pressed or if there is an alarm signal, the boiler goes into the thermal shutdown phase which entails the automatic execution of the following stages:

- Pellet loading is stopped.
- The room fan continues to operate until the requested temperature is reached.
- The flue fan is set to its highest value, which it keeps until the requested temperature is reached, plus a safety time of 10 additional minutes. After that, if the fume temperature has decreased below the switch off threshold, it stops, otherwise the cooling process goes on.
- If the stove has switched off normally, but owing to thermal inertia, the fume temperature goes over the threshold again, the switch off process is reactivated until the temperature decreases again.

8.9 POWER FAILURE

- After a **black-out** lower than 10 seconds, the stove turns back to the power which was settled.
- After a **black-out** of more than 10 seconds, the stove enters the during shutdown. Completed this phase, it starts automatically up with the different phases.

8.10 POWER FAILURE WITH UPS ACTIVE (ONLY IF THE STOVE IS PRESET)

After a power **black-out**, with UPS and interface connected and enabled, the stove will run at minimum power for the entire period set in the 'UPS' menu. At the end of this time, the stove will go into shutdown.

Once the cooling phase is over and the power has been restored, the stove will automatically restart with the various phases.

8.11 ADJUSTMENTS MENU

To access the adjustments menu act as follows:

- Press the + - keys
- Scroll with the <> arrows and select "Set Room T" or "Air Fan Speed 1" or "Air Fan Speed 2" or "Comfort Mode" or "Fire"
- Press "menu" to access the selected option.
- Modify with the + - keys.
- Press "menu" to confirm and "esc" to exit.

Set Room T. - this function allows setting the desired temperature in the room where the stove is installed, starting from a minimum of 5°C up to a maximum of 35°C. When this condition is met, the stove reaches the minimum consumption values (flame and hot air fan speed at minimum values) and then goes back to these values when the ambient temperature goes below the set threshold (see **Fig. 11**).



Fig. 11 - Display

Note: The full stop to the right of the ambient temperature shown in the control panel display (upper right) indicates the half degree (e.g. 23.° means 23.5°C).

Air Fan Speed 1 - this function allows selecting the desired speed for the ambient fans from 1 to 5 or A. A means automatic, ventilation depends on power, recommended setting (see **Fig. 12**).

Air Fan Speed 2 - (ONLY FOR STOVES WITH DUCTING) this function allows selecting the desired speed for the DUCTING fans from 1 to 5 or A. A means automatic, ventilation depends on power, recommended setting (see **Fig. 13**).

Air Fan Speed. 3 - (ONLY FOR STOVES WITH DUCTING) this function allows selecting the desired speed for the DUCTING fans from 1 to 5 or A. A means automatic, ventilation depends on power, recommended setting (see **Fig. 14**).



Fig. 12 - Display



Fig. 13 - Display



Fig. 14 - Display

With function "1" or "2" or "3" or "4" or "5" the fan is forced to work at the selected output. (For example: by setting "3", even if the fan is set to heat output 5 it will work as if set to heat output "3", etc.).



If the stove is set to maximum heat output 5 and the fans to minimum output 1, this may cause overheating and the "THERMAL SAFETY" alarm to go off.

Comfort Mode - In the air versions, it cannot be deactivated. At power 1 the fans are off.

In versions with ducting, the comfort mode allows you to automatically activate or deactivate all the fans at power 1.

If set in automatic (A), the comfort mode is active by default and disables, in addition to the room fan, also the ducting fans. To reactivate them, simply set their adjustment other than automatic, e.g. 1,2,3,4,5.

Fire - this function allows setting the flame power from a minimum of 1 to a maximum of 5. The power levels correspond to a different fuel consumption value: by setting 5 you can heat the room in less time, while by setting 1 you can keep the ambient temperature constant for a longer period. The flame set goes to the minimum value automatically when the set temperature value is reached.

If only one notch appears, the stove has a flame power equal to 1.

If 5 notches appear, the stove has a flame power equal to 5.

If the notches flash, automatic cleaning is under way.



Fig. 15 - Display



Fig. 16 - Power levels

8.12 PROGRAMMED MODE (TIMER) - MAIN MENU



Setting the current day and time is essential for the proper operation of the timer.

There are six TIMER programmes, for each one the user can decide the start-up and shutdown time as well as the day of the week in which it is active.

When one or more programmes are active, the panel alternately displays the boiler status and TIMER "n" whereby "n" is the number relating to the activated timer programmes, separated from each other with a dash.

Example:

- TIMER 1 Timer programme 1 active.
- TIMER 1-4 Timer programmes 1 and 4 active.
- TIMER 1-2-3-4-5-6 Timer programmes all active.

EXAMPLE OF PROGRAMMING

With boiler on or off:

- access the MENU,
- scroll to TIMER with the <> arrows,
- press the "Menu" key
- the system proposes "P1" (Press the <> keys for the subsequent timers P2, P3, P4, P5, P6)
- to activate "P1" press the "Menu" key
- press + - and select "ON"
- confirm with the "Menu" key

At this point it will propose 00:00 as starting time, with key + - adjust the starting time and press the "menu" key to confirm. The next step proposes a shutdown time of 10 minutes above that set for start-up: press the + key and adjust the shutdown time, confirm with the "menu" key.

Subsequently the system proposes the days of the week in which to activate or deactivate the previously set timer. With the - or + key highlight with the white background the day in which one wishes to activate the timer and confirm with the "menu" key. If no day of the week is confirmed as active, in turn the timer programme will not appear active in the status screen.

Continue to program the following days or press "ESC" to exit. Repeat the procedure to program the other timers.

8.13 PROGRAMMING EXAMPLES:

P1			P2		
on	off	day	on	off	day
08:00	12:00	mon	11:00	14:00	mon
Boiler on from 08:00 to 14:00					
on	off	day	on	off	day
08:00	11:00	mon	11:00	14:00	mon
Boiler on from 08:00 to 14:00					
on	off	day	on	off	day
17:00	24:00	mon	00:00	06:00	tue
Boiler on from 17:00 on monday to 06:00 on tuesday					

8.14 NOTES FOR TIMER OPERATION

- Start-up with the timer always takes place with the last temperature and ventilation settings (or with default 20°C and V3 settings in the event they have never been changed).
- It is possible to set the shutdown time from "ignition time + 10 minutes" up to 23:50. If 24:00 is set as shutdown time, the stove will not switch off (use this shutdown time, for example, when the next day is programmed to continue from 00:00).
- If the shutdown time is not already memorised, it proposes a start-up time in + 10 minutes.
- A timer programme switches the boiler off at 24:00 of one day and another programme switches it on at 00:00 of the next day: the boiler stays on.
- A programme proposes a start-up and shutdown in times included within another timer programme: if the boiler is already on, start will not have any effect, while OFF will switch it off.
- In the boiler on and timer active condition, press the OFF key and the boiler will switch off, it will switch on automatically at the next time set on the timer.
- In the boiler off and timer active condition, press the ON key and the boiler will switch on, it will switch off at the time set on the active timer.

8.15 AUTO ECO MODE (SEE SECTION F-G SETTINGS MENU A PAG. 12)

To activate the "Auto-Eco" mode and adjust the time refer **SETTINGS MENU a pag. 12**.

The possibility to adjust the "**t Off Time Eco**" comes from the need to ensure proper operation in the various rooms the boiler can be installed in and prevent continuous shutdowns and start-ups in the event the temperature is subject to sudden changes (air currents, poorly insulated rooms, etc.).

The ECO switch off procedure is automatically activated when the power recall device is activated (Room probe +1°C or external thermostat with open contact, see **Fig. 17**). "**t Off Time Eco**" time decrease starts (5 minutes by default, see **Fig. 18**, and can be modified from the "Settings" menu). During this phase the panel view is activated ON with the small flame and alternates chrono (if ON) - active Eco.



Fig. 17 - Active eco 1



Fig. 18 - Active eco 2



Fig. 19 - Active eco 3

On the upper display the minutes for the Eco Stop countdown are shown. The flame goes to P1, where it remains until the set "**t Off Time Eco**" time is over and, if conditions are still met, it switches to the switch-off process. The ECO switch-off countdown is reset if one of the devices resumes recalling power.

When the switch-off procedure begins, the panel shows: Off - Active Eco - small flashing flame (see **Fig. 19**).

When the stove is switched off, the panel shows active OFF-ECO with the flame icon off.

For an ECO switch on, the following conditions must be met simultaneously:

- Room probe -1°C or external thermostat with closed contact (for at least 20" to avoid false recalls).
- After 5 minutes from the beginning of the switch-off procedure.

8.16 SLEEP FUNCTION (MAIN MENU)

The sleep function is activated only when the boiler is switched on and allows to quickly set a time at which the product must switch off.

To set the Sleep function act as follows:

- Enter MENU
- Scroll to SLEEP with the <> arrows
- Press Menu
- With the + - keys adjust the desired shutdown time.

The panel proposes a shutdown time of 10 minutes from the current time, adjustable with key 4 until the next day (I can therefore delay the shutdown for up to a maximum of 23 hours and 50 minutes).



Fig. 20 - Sleep

If the SLEEP function is active with the TIMER active the first has priority over the latter, therefore the boiler will not switch off at the time set on the timer but instead by the time established by the sleep function, even if later than the time set on the timer.

8.17 EASY SET FEATURE (SEE SECTION X SETTINGS MENU A PAG. 12)

Proper operation of a stove mainly depends on the flue it is connected to. Once it is connected, it is equally important to perform proper adjustment of combustion parameters.

The Easy Set feature makes it possible to adjust combustion more easily, in the event that one should notice that the stove does not properly burn the fuel.

In the "Settings" menu, under the heading Easy Set, there are 4 configurations, SET1-SET2-SET3-SET4.

Select the SET based on the type of installation.

Caution, before changing the stove's programming :

- It is recommended to change the factory settings under the supervision of an authorised technician.
- Before installation, ensure the flue has been installed and certified by suitable personnel according to the legal provisions in force.

Examples of available "Easy Set" configurations compared to «typical» installation of reference:

SET 0 : Default parameters

SET 1 : Vertical exhaust

SET 2 : Concentric vertical exhaust (mainly used in France)

SET 3 : Horizontal concentric wall exhaust (only used and permitted in France)

SET 4 : Smoke fitting with horizontal section

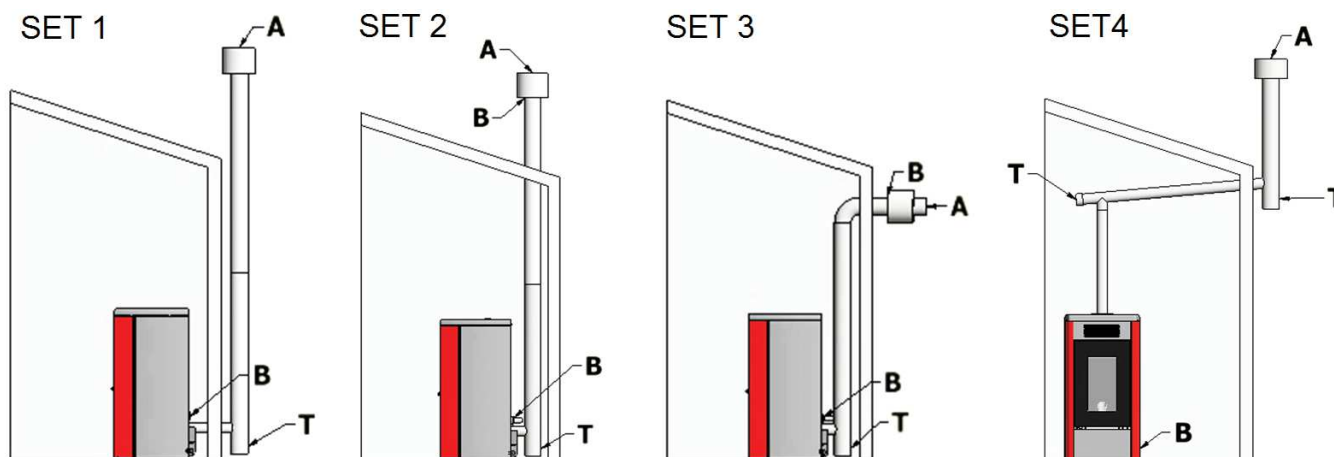


Fig. 21 - Ensemble d'exemples

LEGENDA	Fig. 21
A	Smoke Outlet
B	Combustion Air Intake
T	Inspection cap

8.18 PELLETS RECIPE (SEE SECTION H SETTINGS MENU A PAG. 12)



Changes to be made with the support of the authorised technician.



Activates only with the Easy Set function disabled, "SET: 0" !

This function is for adapting the stove to the pellets that are being used. In fact, as there are several types of pellets on the market, boiler operation is extremely variable depending on the fuel quality. In the event the pellets tend to clog the brazier due to an excessive load of fuel or in the event the flame is always high even at low powers and, vice versa if the flame is low one can decrease/increase the amount of pellets in the brazier:

The available values are:

- 30= 30% reduction with respect to the default setting.
- 25= 25% reduction with respect to the default setting.
- 20= 20% reduction with respect to the default setting.
- 15 = 15% reduction with respect to the default setting.
- 10= 10% reduction with respect to the default setting.
- 5= 5% reduction with respect to the default setting.
- 0= No variation.
- +5= 5% increase with respect to the default setting.
- +10 = 10% increase with respect to the default setting.
- +15 = 15% increase with respect to the default setting.

8.19 SMOKE RPM VARIATION (SEE SECTION I SETTINGS MENU A PAG. 12)



Changes to be made with the support of the authorised technician.



Activates only with the Easy Set function disabled, "SET: 0" !

If the installation presents difficulties for smoke evacuation (no draught or no pressure in the duct), the smoke and ash expulsion speed can be increased. This change resolves all the potential problems related to pellets clogging in the brazier and deposits forming at the bottom of the brazier itself caused by poor quality fuel or fuel that produces a lot of ashes. The values available are from -27% to +27% with variations of 3 points at a time. The variation in negative can be used in case the flame is too low.

8.20 UPS (SEE SECTION AA SETTINGS MENU A PAG. 12)



Changes to be made with the support of the authorised technician.

This function is used to keep the stove running even in the event of a power failure, with the help of a UPS battery and the UPS READY interface.

To enable this function, it is necessary to purchase:

- UPS READY kit (cod. 5024006)
- UPS battery (not supplied by the parent company)

For the functions, connections and capacity of the UPS battery to be purchased, follow the instructions in the manual supplied with the UPS READY.

8.21 CHIMNEY SWEEP FUNCTION (FOR MAINTENANCE TECHNICIANS ONLY) - SEE SECTION K SETTINGS MENU A PAG. 12

This function can be activated only when the boiler is on and with power output and heating operation power with parameters P5, with fan (if present) in V5. Any loading/smoke ventilation percentage corrections must be taken into account. This status lasts 20 minutes, the countdown is displayed on the panel. At any time the technician can interrupt this stage by quickly pressing the on/off key.

9 FUEL

9.1 FUEL

- Use top-quality pellets because they have influence in the calorific value and in ash remains.
- Not adequate pellets cause a bad combustion, a frequent burning pot obstruction and exhaust conduits obstruction. Further it decreases the calorific value, soils the glass and increases consumptions and ash and unburnt granules quantity.



Humid pellets cause a bad combustion and running, so please assure you that they are stored in dry places and far at least one meter from the stove and/or any other source of heat.

- It is advisable to try different type of pellets available on the market and to choose that which gives the best performance.
- Do not use pellets other than natural wood because they may contain very aggressive chemical components which corrode metal.
- Pellets of variable quality and size are available on the market: the smaller the pellet, the greater the fuel supply, resulting in poor combustion



Depending on the type of pellets it could be necessary a parameters adjustment, please contact an Authorized Assistance Service.

The main quality certifications for pellets currently available on the European market guarantee that the fuel complies with class A1/A2 according to ISO 17225-2. These certifications include, for example, ENPlus, DINplus, Ö-Norm M7135, and specifically assure that the following characteristics are complied with:

- calorific value: 4.6 - 5.3 kWh/kg.
- Water content: $\leq 10\%$ of the weight.
- Percentage of ash: max 1.2% of the weight (A1 less than 0.7%).
- Diameter: $6\pm1/8\pm1$ mm.
- Length: 3-40 mm.
- Content: 100% untreated wood without the addition of binding agents.



**The company recommends using certified fuel for its products (ENPlus A1, DINplus, Ö-Norm M7135).
The use of pellets that do not comply with the characteristics specified previously may compromise the operation of your product and therefore invalidate the warranty and product liability.**

9.2 PELLET SUPPLY



Fig. 22 - Wrong opening of the pellets bag



Fig. 23 - Right opening of the pellets bag

It is necessary to avoid to fill the hopper with the pellet when the stove is running.

- Do not get the bag of pellet in contact with hot stove surfaces.
- Do not empty the hopper with remaining fuels (unburnt pellet) from the burning pot coming from ignition waster.

9.3 PELLET REFUELLING TIMER

This stove is equipped with a safety timer that activates after the pellet hopper door has been open for **90 seconds** during reloading (see **Fig. 24** and **Fig. 26**). After 90 seconds, the stove goes into "A05" depression alarm and proceeds to switch off. Wait until it switches off, then light it again.



Fig. 24 - Door open



Fig. 25 - deteriorated gasket




Fig. 26 - Timer: 90 seconds



To operate correctly, the stove must work with the pellet hopper door always closed; should it remain open for more than 90 seconds, the stove switches off.

- The loading system stops when the tank door is opened.



*Before closing the lid, make sure there are no pellets below the gasket. Pellets deteriorate the gasket and eliminate its airtight sealing. (vedi **Fig. 25**)*

10 VENTILATION

- The stove is endowed with a ventilation system.
- The air blown from fans keeps the appliance at a low temperature range in order to avoid high stresses to the materials which make it up.
- Do not cover the hot air outlet slits with any object to avoid stove's overheating!
- The stove is not suitable for food cooking.



Fig. 27 - Do not cover air slits

11 REMOTE CONTROL (OPTIONAL)

- The stove can be operated through a remote control (optional)
- Operation requires 1 CR 2025 (3Volt) Lithium battery
- Operating temperature 0 °C / 50 °C
- 38 khz infrared signal



Used batteries contain metals which are harmful for the environment; they must therefore be disposed of separately in the special containers.

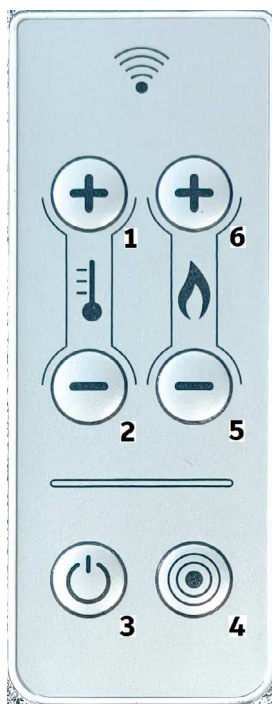


Fig. 28 - Remote control

LEGEND	Fig. 28
Button 1	Increase the desired temperature (5÷35 °C)
Button 2	Decrease the desired temperature (35÷5 °C)
Button 3	On / off
Button 4	Menu
Button 5	Decrease the power level from 5 to 1
Button 6	Increase the power level from 1 to 5

12 REMOTE CONTROL WITH THERMOSTAT (OPTIONAL)

- The stove can be controlled by remote control with thermostat code 5024010 (optional).
- 3 AAA nickel cadmium type batteries (1.5 Volt) are required for operation.
- Operating temperature 0°C / 50°C.
- BLE 2.4 GHz radio signal.
- Remote control with integrated room sensor with 0.5°C resolution.

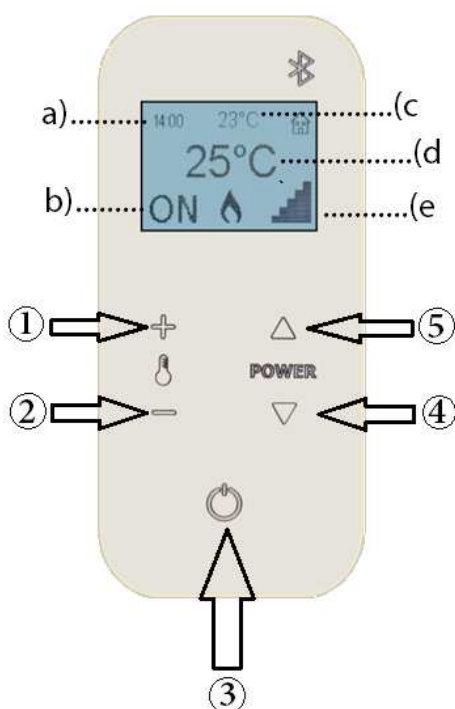
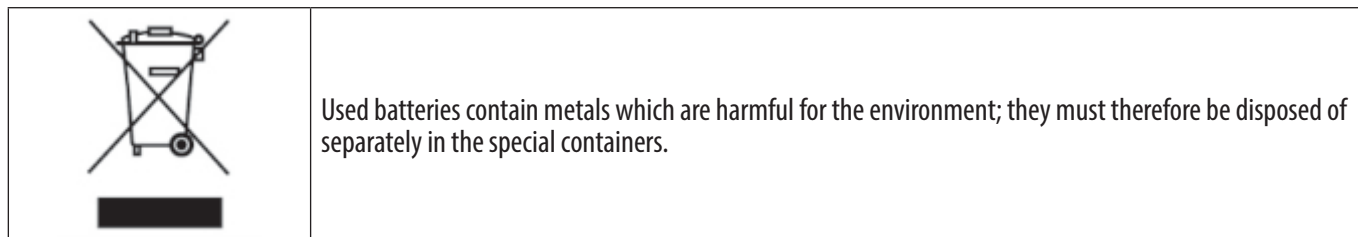


Fig. 29 - Remote control with thermostat

LEGEND	Fig. 29
<i>a</i>	Time
<i>b</i>	Status
<i>c</i>	Ambient temperature
<i>d</i>	Set temperature
<i>e</i>	Power
1	Increase the desired temperature (5-35 °C)
2	Decrease the desired temperature (35-5 °C)
3	On / off
4	Decrease power level from 5 to 1
5	Increase the power level from 1 to 5
3 + 4	To access the menu, press key 3 and 4 simultaneously for a few seconds

The remote control communicates with the stove's display and, thanks to the integrated room sensor, can manage the room temperature like a thermostat.

The remote control can:

- Switch the stove on and off.
- Set the desired temperature by pressing **+** or **-** (1; 2).
- Set the desired power by pressing the power increase or decrease key (4 or 5).
- Access the remote control menu by simultaneously pressing the power on and power off keys for a few seconds (3 + 4).

13 SAFETY DEVICES AND ALARMS

The product is supplied with the following safety devices

13.1 PRESSURE SWITCH

- It controls pressure in the fume duct. It blocks the pellet feed screw in the following instances:
- clogged exhaust
- Significant negative (wind)
- clogged fume passages
- open pellet loading tank
- open fire door or worn/broken gaskets.
- see SMOKE RPM VARIATION User Manual

13.2 SMOKE TEMPERATURE PROBE

Detects the temperature of the smoke, thereby enabling start-up or stopping the product when the temperature drops below the preset value.

13.3 CONTACT THERMOSTAT IN THE FUEL HOPPER

If the temperature exceeds the preset safety level, it immediately shuts down boiler operation.

13.4 ELECTRICAL SAFETY

The product is protected against sudden current surges by a main fuse in the power supply panel on the rear part of the product. Other fuses that protect the electronic boards are found on the latter.

13.5 SMOKE FAN

If the fan stops, the electronic board promptly shuts off the pellets supply and an alarm message is displayed.

13.6 GEAR MOTOR

If the gear motor stops, the boiler will continue to run until the flame goes out due to lack of fuel and until a minimum level of cooling is reached.

13.7 TEMPORARY POWER CUT

If the power cut lasts less than 10" the boiler returns to its previous operating status; if it lasts more it carries out a cooling/restart cycle.

13.8 FAILED START-UP

If during ignition no flame develops, the boiler will go into alarm condition.

13.9 BLACKOUT WITH THE BOILER ON

In the event of a power cut (BLACKOUT) the boiler behaves as follows:

- Blackout below 10": it returns to its operation in progress;
- In the event of a power cut that lasts over 10" with the boiler on or in the start-up stage, when the boiler is powered again it goes back to the previous operating condition with the following procedure:

- 1) It performs a cooling phase to the maximum.
- 2) Performs a new ignition.

During stage 1 the panel displays ON BLACK OUT.

During stage 2 the panel displays Start-up.

If during stage 1 the boiler receives commands from the panel and thus carried out manually by the user, then the boiler stops executing the blackout recovery status and proceeds to restart or shutdown as requested by the command.

13.10 ALARM ALERTS

Whenever an operating condition other than that designed for the regular operation of the boiler occurs, there is an alarm condition. The control panel gives information on the reason of the alarm in progress.

PANEL ALERT	TYPE OF PROBLEM	SOLUTION
A01	The fire does not ignite.	Check whether the brazier is clean / level of pellets in the hopper.
		Check pellet level in the tank.
		Check that the burning pot is correctly positioned in its case and does not contain deposits or unburned material.
		Check that the pellet cover and the fire door are correctly closed.
		Clogged flue
A02	The fire goes off abnormally.	Damaged ignition resistance
A03 Thermostat alarms	The temperature of the pellets hopper or the water temperature exceed the envisioned safety threshold.	Check the level of pellets in the hopper.
A04	Smoke overheating.	Wait for the cooling stage to end, cancel the alarm and restart the boiler setting the fuel loading at minimum (SETTINGS menu - Pellet Recipe).
		Check that dust does not clog the aeration grid on the stove back.
		If the alarm persists, contact the service centre. Check if the room fan works properly (if present).
A05 Pressure switches alarm	Flue gas pressure switch trip. (see SMOKE RPM VARIATION User Manual)	The set smoke threshold has been exceeded. Reduce pellets loading (SETTINGS menu - Pellet Recipe).
A06 Cleaner alarm or pressure switch (Alarm only visible if self-cleaning brazier present)	Cleaner blocked	Check for chimney obstructions/fire door opening, pellet tank opening, gasket seals, side fire ducts cleaning, clogged hose connection, excess flue length, unfavourable weather conditions and clogged stove.
		Clean the brazier and remove any objects blocking the rotation mechanism.
		Check that the door and/or pellet lid are closed
A08	Abnormal smoke fan operation.	If the alarm persists, contact the service centre.
A09	Smoke probe faulty.	If the alarm persists, contact the service centre.
SERVICE	Routine maintenance alert (it does not block the system).	If the alarm persists, contact the service centre.

13.11 ALARM RESET

To reset the alarm you must keep the 1 (ESC) button pressed for some time. The stove performs a check to determine whether the warning cause is still present.

If this is the case, the warning will be shown again, otherwise the stove will switch to the OFF position.

If the warning is still present, contact a service centre.

13.12 CLEANER

If the bottom of the burning pot remains out of position or the circuit board detects that the bottom remains stationary during cleaning, the CLEANER ALARM will appear.

When the alarm appears, proceed as follows:

- clean and remove the burning pot.
- check that the rotating bottom of the burning pot is not blocked by objects. If present, remove them.
- restart the stove.

If the alarm persists after restarting, call an authorised technician: he can temporarily disable the rotation of the mechanism.

The stove carries out an automatic cleaning after 10 hours of continuous operation.

14 ROUTINE MAINTENANCE

14.1 INTRODUCTION

For a long working life of the stove, have a periodic cleaning of the stove as described in the following paragraphs.

- Fume outlet pipes (fume conduit + chimney flue + chimney pot) must always be cleaned, scrubbed and checked by an authorized technician in compliance with local regulations, with the instructions of the manufacturer and those of your insurance company.

- If there are no local regulations and no instruction from your insurance company, it is necessary to have your fume pipe, chimney flue and chimney pot cleaned at least once a year.
- It is also necessary to have the combustion chamber, motors and fans cleaned and to have the gaskets and the electrical elements checked at least once a year.



All these operations must be planned in time with your Authorized Technical Assistance Service.

- After a long ineffective time, before turning on the stove check if there are obstructions in the fume exhaust.
- If the stove had been using continuously and intensely, the whole system (chimney included), must be cleaned and checked more frequently.
- In case of replacement of damaged pieces please ask for the original spare part at the Authorized Retailer.

14.2 BEFORE EACH START-UP

Clean the ash and any deposits in the brazier that could clog the air passage holes.

If the pellets in the hopper finish, unburned pellets may accumulate in the brazier. Always empty the residue in the brazier before starting up. Check that there is no excessive ash accumulated under the burning pot compartment. If it exceeds 2 cm of height, we recommend sucking it.



REMEMBER THAT ONLY A CORRECTLY POSITIONED AND CLEAN BRAZIER CAN GUARANTEE START-UP AND OPTIMAL OPERATION OF YOUR PELLET PRODUCT.

For the brazier to be cleaned properly, remove it from its housing completely and thoroughly clean all the holes and the grate on the bottom. If good quality pellets are used, you will normally only need to use a brush to restore the optimal operating conditions of the component.



Fig. 30 - Example of cleanly brazier



Fig. 31 - Example of dirty brazier

14.3 BURNING POT AND ASH TRAY CLEANING

- Open the door.



Fig. 32 - Burning pot extraction



Fig. 33 - Burning pot cleaning

- Extract the burning pot (see **Fig. 32**) from its seat and empty it from the ash.
- If necessary clean with a pointed object the holes obstructed by encrustations (see **Fig. 33**).



Fig. 34 - Burning pot box cleaning



Fig. 35 - Cleaning with a brush

- Clean and drain away the burning pot box and ash tray box from ash which has accumulated in its inner (see **Fig. 34**).
- Clean also the hole for pellet drop with a brush (see **Fig. 35**).
- The ash remains must be poured in a metal container with a sealed lid and this container must never get in touch with combustible materials (for example put on a wooden floor), as the inner ash keeps the embers firing for a long time.
- Only when the embers are off the ash could be poured in the organic waste.
- Pay attention if the flame becomes red colored, if it is weak or if black smoke creates in the inner: in this case the burning pot is encrusted and needs to be cleaned. If it is broken, it must be replaced.

14.4 SELF-CLEANING BRAZIER CLEANING

- Open the door.



Fig. 36 - Burning pot extraction



Fig. 37 - Burning pot cleaning

- Extract the burning pot (see **Fig. 36**) from its seat.
- If necessary clean with a pointed object the holes obstructed by encrustations (see **Fig. 37**).



Fig. 38 - Burning pot box cleaning



Fig. 39 - Cleaning with a brush

- Clean and drain away the burning pot box and ash tray box from ash which has accumulated in its inner (see **Fig. 38**).
- Clean also the hole for pellet drop with a brush (see **Fig. 39**).
- The ash remains must be poured in a metal container with a sealed lid and this container must never get in touch with combustible materials (for example put on a wooden floor), as the inner ash keeps the embers firing for a long time.
- Only when the embers are off the ash could be poured in the organic waste.
- Pay attention if the flame becomes red colored, if it is weak or if black smoke creates in the inner: in this case the burning pot is encrusted and needs to be cleaned. If it is broken, it must be replaced.



CAUTION: cleaning must be carried out with the stove switched off, there may be moving gears.

14.5 CATALYTIC FILTER

- If the two catalytic filters (honeycomb, one on the right and one on the left) **Fig. 40** are located in the upper part of the combustion chamber, they should be cleaned once a week, or more frequently if necessary (in this case, remove the hearth head as indicated in the "Cleaning the Flue Pipe" chapter of the technical manual).
- Vacuum out any debris that has formed in the filter holes **Fig. 41**.



Fig. 40 - .



Fig. 41 - .

14.6 HOPPER CLEANING



Fig. 42 - Hopper cleaning

Per each pellets supply, check the probable presence of meal, sawdust and other remanins on the hopper bottom. If present, they must be removed with the aid of a vacuum cleaner (see **Fig. 42**).

14.7 FUME PIPES ANNUAL CLEANING

Clean annually from soot with brushes.

The cleaning operation must be executed by a specialized stove-repairer who will provide for the cleaning of fume pipe, chimney flue and chimney pot. He will also check their efficiency and will release a written declaration of the safety of the appliance. This operation must be executed at least once a year.

When it is not in use, we recommend disconnecting the appliance from the smoke duct. This avoids condensation from forming inside the combustion chamber.

14.8 GENERAL CLEANING

For cleaning external and inner parts of the stove do not use steel wools, muriatic acid or other corrosive and abrasive materials.

14.9 CLEANING OF PAINTED METAL PANELS

To clean painted metal panels use a soft cloth. Do not use degreasant agents like alcool, diluents, acetone, gasoline because these could irremediably damage the varnish.

14.10 CLEANING OF CERAMIC AND STONE PANELS

Some stove models has an external lining made up of ceramic or stone. These pieces are handmade therefore they could inevitably present crazings, seedinesses, shadings.

To clean ceramic or stone panels use a soft and dry cloth. If using any cleaners this will seep through the crazings putting them in evidence.

14.11 GASKET REPLACEMENT

The appliance CANNOT be used if the gaskets of the fire door, tank or smoke chamber are damaged. They must be replaced by an authorised technician to ensure the correct operation of the stove.



Use exclusively original spare parts.

14.12 GLASS CLEANING

The glass-ceramic of the fire door is able to stand till 700°C but not to thermal shocks.

The probable cleaning with usual sale product for glass cleaning must be effected at cool glass in order to avoid explosions.



You should clean the fire door glass every day!

14.13 SHUTDOWN (END OF SEASON)

At the end of each season, before switching the product off, it is recommended to remove all the pellets from the hopper with a vacuum cleaner with a long pipe.

We recommend removing the unused pellets from the hopper because they can retain moisture. Disconnect any combustion air ducting that can lead to moisture inside the combustion chamber but, above all, ask the specialised technician to refresh the paint inside the combustion chamber with the special silicone spray paints (available at any store or Technical Assistance Centre) during the necessary annual end of season scheduled maintenance operations. This way the paint will protect the inner parts of the combustion chamber, blocking any type of oxidative process.

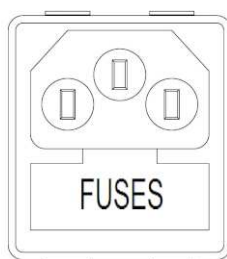


Fig. 43 - Shutter with fuses to remove

When not in use the appliance must be disconnected from the mains power supply. It is recommended to remove the power cable for additional safety, especially in the presence of children.

The service fuse may have to be replaced if the control panel display does not switch on.

There is a fusebox on the back of the product, near the power socket.

After removing the plugs from the power socket, open the fusebox cover with a screwdriver and replace the fuses if necessary (3.15 A delayed) - seek assistance from an authorised and qualified technician.

14.14 CHECKING THE INNER COMPONENTS



ATTENTION!

The internal electromechanical components must only be checked by qualified personnel whose technical expertise includes combustion and electricity.

It is mandatory for this yearly maintenance to be carried out (with a scheduled service contract). This operation consists of a visual and functional inspection of the internal components. A summary of the checks and/or maintenance operations that are essential for the correct operation of the product is provided below.

USER/TECHNICIAN	PARTS/FREQUENCY	1 DAY	2-3 DAYS	7 DAYS	1 YEAR
UNDER THE USER'S RESPONSIBILITY	Brazier	X			
	Self-cleaning brazier (if applicable)			X	
	Ash compartment **			X	
	Glass		X		
BY THE QUALIFIED TECHNICIAN	Upper exchanger				X
	Lower exchanger				X
	Smoke duct				X
	Gaskets				X
	Door closure operation				X

** Emptying of the ash compartment depends on various factors (pellet type, stove power, stove use, type of installation...); the exact emptying time will be suggested by experience.

15 IN CASE OF ANOMALY

15.1 PROBLEM SOLVING



Before of every Authorized Technician intervention, the same Technician has the duty to check if the parameters of the mother board correspond to those of the table you own.



In case of doubts regarding the use of the stove, please contact ALWAYS the Authorized Technician on order to avoid irreparable damages!

PROBLEM	CAUSE	SOLUTION	INTERVENTION
The control display does not switch on	The stove is without power supply	Check if the plug is connected.	
	Burned protection fuse in the electric socket	Replace the protection fuses in the electric socket (3.15A-250V).	
	Faulty control display	Replace the control display.	
	Faulty flat cable	Replace the flat cable.	
	Faulty electronic board	Replace the mother board.	
Pellets do not reach the combustion chamber	Empty hopper	Full the hopper.	
	Open fire door or open pellet door	Close fire door and pellet door and check that there are no pellet grains at the gasket level.	
	Clogged stove	Fume chamber cleaning	
	Auger blocked by a foreign object (for example nails)	Clean the auger.	
	The auger geared motor is out of order	Replace the geared motor.	
	Check if on the display there is an "ACTIVE ALARM"	Have the stove checked.	

PROBLEM	CAUSE	SOLUTION	INTERVENTION
The fire extinguish and the stove stops	Empty hopper	Full the hopper.	
	Auger blocked by a foreign object (for example nails)	Clean the auger.	
	Bad quality pellets	Try other types of pellets.	
	Pellet drop value too low "phase 1"	Adjust the pellet loading.	
	Check if on the display there is an "ACTIVE ALARM"	Have the stove checked.	
Flames are weak and orange coloured, pellets do not burn properly and the glass blackens	Not sufficient combustion air	Check as following: probable obstructions of the combustible air inlet from the back or from the bottom of the stove; burning pot obstructed holes with too ash remains. Have the fan blades and auger cleaned. (see SMOKE RPM VARIATION User Manual)	
	Obstructed exhaust	The exhaust chimney is partially or totally obstructed. Contact an expert stove-repairer who checks the stove from the exhaust up to the chimney pot. Provide immediately for stove cleaning.	
	Obstructed stove	Provide immediately at the inner cleaning of the stove.	
	The fume fan is out of order	The pellets can burn also thanks to chimney flue depression without the aid of the fume fan. Have the fume fan immediately replaced. It can be noxious to health to let the stove running without fume fan.	
The exchanger fan continues to turn even though the stove has just cooled	Faulty fume temperature probe	Replace the fume probe.	
	Faulty mother board	Replace the mother board.	
Ash remains along the stove	Faulty or out of order door gaskets	Replace the gaskets.	
	Not sealed fume pipes	Contact an expert stove-repairer who will immediately provide for sealing the junctions with high-temperature silicone and/or for replacing pipes with those in compliance to current regulations. A not sealed fume channelisation can be noxious to health.	
The stove is at its highest power but does not heat up.	Ambient temperature reached.	The stove is at its minimum value. Increase the desired ambient temperature.	

PROBLEM	CAUSE	SOLUTION	INTERVENTION
Stove running and display showing "Smoke Overtemperature"	Reached fume outlet limit temperature	The stove runs at minimum. NO PROBLEM!	
The stove's smoke duct produces condensation	Low smoke temperature	Check that the flue is not clogged.	
		Increase stove power to minimum (pellet drop and fan revs).	
		Install condensation collection cup.	
Stove running and display showing "SERVICE"	Routine maintenance alert (it does not block the system)	When this flashing message appears upon start-up, it means that the preset operating hours have elapsed before maintenance. Contact the service centre.	
The rotating base of the brazier no longer rotates and the display reads CLEANER ALARM OR PRESSURE SWITCH (problem only valid for stoves with self-cleaning brazier)	Mechanism blocked by foreign object (such as nails, pellets)	Clean the brazier compartment and remove any foreign bodies blocking the mechanism	
	Pressure switch intervention	Check that the door and/or pellet lid are closed	
	Faulty position switch	Replace position switch	

16 TECHNICAL FEATURES

Brand: CADEL				
Model: SPIN PLUS 7 UP-TWIN T1				
Derived models: EOS 6 BI-FLUX T1 - EOS 6 T1				
EU Standard: EN 16510-1:2022 / EN 16510-2-6:2022				
GENERAL	Appliance Type (tightness)	Type	CC50	
	Continuous (CON) or intermittent (INT) operation	CON / INT	INT	
	Fuel type		Pellet	
	Fuel dimensions		Ø6 L=3÷40	
	Environmental classification stars DM.186 (IT)		5 *	
	Energy class (scale A++/G)		A++	
	Energy efficiency index		130	EEl
	Seasonal space heating efficiency		89	η _S
NOMINAL	Nominal heat input	P _{inputnom}	7	kW
	Nominal heat output	P _{nom}	6,5	kW
	Nominal space heat output	PSH _{nom}	6,5	kW
	Nominal water heat output	PW _{nom}		kW
	Fuel consumption at nominal heat output	kg/h _{nom}	1,4	kg/h
	Efficiency at nominal heat output	η _{nom}	92	%
	CO ₂ at nominal heat output	CO _{2nom}	10,2	%
	CO (%) at 13% O ₂ at nominal heat output	CO% _{nom} (13% O ₂)	0,010	% (13% O ₂)
	CO at 13% O ₂ at nominal heat output	CO _{nom} (13% O ₂)	125	mg/m ³ (13% O ₂)
	NO _x at 13% O ₂ at nominal heat output	NO _{xnom} (13% O ₂)	100	mg/m ³ (13% O ₂)
	OGC at 13% O ₂ at nominal heat output	OGC _{nom} (13% O ₂)	1	mg/m ³ (13% O ₂)
	PM at 13% O ₂ at nominal heat output	PM _{nom} (13% O ₂)	15	mg/m ³ (13% O ₂)
	Flue gas outlet temperature at nominal heat output ^{**}	T _{snom}	170	°C
	Minimum flue draught at nominal heat output ^{***}	p _{nom}	11	Pa
	Flue gas mass flow at nominal heat output	φ _{f,g nom}	4,0	g/s
REDUCED	Partial load heat input	P _{inputpart}	3,5	kW
	Partial load heat output	P _{part}	3,2	kW
	Partial space heat output	PSH _{part}	3,2	kW
	Partial load water heat output	PW _{part}		kW
	Fuel consumption at partial load heat output	kg/h _{part}	0,7	kg/h
	Efficiency at part load heat output	η _{part}	90	%
	CO ₂ at partial load heat output	CO _{2part}	5,4	%
	CO (%) at 13% O ₂ at partial load heat output	CO% _{part} (13% O ₂)	0,013	% (13% O ₂)
	CO at 13% O ₂ at partial load heat output	CO _{part} (13% O ₂)	163	mg/m ³ (13% O ₂)
	NO _x at 13% O ₂ at part load heat output	NO _{xpart} (13% O ₂)	110	mg/m ³ (13% O ₂)
	OGC at 13% O ₂ at part load heat output	OGC _{part} (13% O ₂)	1	mg/m ³ (13% O ₂)
	PM at 13 % O ₂ at part load heat output	PM _{part} (13% O ₂)	15	mg/m ³ (13% O ₂)
	Flue gas outlet temperature at part load heat output ^{**}	T _{spart}	121	°C
	Minimum flue draught at partial load heat output ^{***}	p _{part}	11	Pa
	Flue gas mass flow at part load heat output	φ _{f,g nom}	3,6	g/s
INSTALLATION	Chimney designation	T _{class}	T200G	
	Maximum load of a chimney over the appliance	m _{chim}	20	kg
	Standing air loss	V _h		m ³ /h
	Air heating outlet diameter		80	mm
	Heatable volume (with respective requirement of 20/35/55 W/m ³)		182	m ³
	Minimum distance to combustible materials (rear)	d _R	150	mm
	Minimum distance to combustible materials (side)	d _S	200	mm
	Minimum distance to combustible materials (bottom)	d _B	0	mm
	Minimum distance to combustible materials (ceiling)	d _C	750	mm
	Minimum distance to non-combustible walls	d _{non}		mm
	Added protective insulation	s		mm
	Thermal conductivity additional insulation	λ _d		W/mK
	Minimum distance to combustible materials (radiant front)	d _P	500	mm
	Minimum distance to combustible materials (radiant bottom)	d _F	300	mm
	Minimum distance to combustible materials (radiant side)	d _L	0	mm

ELECTRICAL CONNECTION	Electrical consumption at nominal heat output	elmax	100	W
	Electrical consumption at part load heat output	elmin	12	W
	Maximum electric power input	Wmax	370	W
	Electrical consumption at standby	eISB	2,0	W
	Power supply voltage - frequency	E - f	230-50	V - Hz
** Flue gas temperature at the appliance outlet, to be used in the chimney sizing calculation (according to EN 13384-1)				
***Consider a minimum draught of 2 Pa in the EN 13384-1 chimney dimensioning calculations				

Marchio: CADEL				
Modello: SPIN PLUS 7 UP-TWIN T1				
DIMENSIONS	Width of the appliance	W	52,5	mm
	Depth of the appliance	L	59	mm
	Height of the appliance	H	110	mm
	Mass of the appliance	m	103	kg
	Pellet tank capacity*	Tankkg	20	kg
	Pellet tank autonomy at nominal heat output*	Autnom	14	h
	Pellet tank autonomy at partial load heat output*	Autpart	29	h
	Ventilation air intake section (cm2)		80	cm2
	Combustion air inlet diameter (mm)		130	mm
	Diameter of the flue gas outlet	dout	80	mm
* Values that can vary due to the used combustible				
Marchio: FreePoint				
Modello: EOS 6 BI-FLUX T1				
DIMENSIONS	Width of the appliance	W	52,5	mm
	Depth of the appliance	L	59	mm
	Height of the appliance	H	110,5	mm
	Mass of the appliance	m	103	kg
	Pellet tank capacity*	Tankkg	20	kg
	Pellet tank autonomy at nominal heat output*	Autnom	14	h
	Pellet tank autonomy at partial load heat output*	Autpart	29	h
	Ventilation air intake section (cm2)		80	cm2
	Combustion air inlet diameter (mm)		130	mm
	Diameter of the flue gas outlet	dout	80	mm
* Values that can vary due to the used combustible				
Marchio: FreePoint				
Modello: EOS 6 T1				
DIMENSIONS	Width of the appliance	W	52,5	mm
	Depth of the appliance	L	54	mm
	Height of the appliance	H	110,5	mm
	Mass of the appliance	m	100	kg
	Pellet tank capacity*	Tankkg	20	kg
	Pellet tank autonomy at nominal heat output*	Autnom	14	h
	Pellet tank autonomy at partial load heat output*	Autpart	29	h
	Ventilation air intake section (cm2)		80	cm2
	Combustion air inlet diameter (mm)		60	mm
	Diameter of the flue gas outlet	dout	80	mm
* Values that can vary due to the used combustible				

Brand: CADEL				
Model: SPIN PLUS 9 UP-TWIN T1				
SPIN PLUS 9 T1 - CRISTAL 9 AIRTECH T1 - CRISTAL 9 AIR T1 - CRISTAL PLUS 9 T2 - DUNE 9 T2 - EOS 8 BI-FLUX T1 - EOS 8 T1				
EU Standard: EN 16510-1:2022 / EN 16510-2-6:2022				
GENERAL	Appliance Type (tightness)	Type	CC50	
	Continuous (CON) or intermittent (INT) operation	CON / INT	INT	
	Fuel type		Pellet	
	Fuel dimensions		Ø6 L=3÷40	
	Environmental classification stars DM.186 (IT)		5 *	
	Energy class (scale A++/G)		A+	
	Energy efficiency index		127	EEl
	Seasonal space heating efficiency		87	η _S
NOMINAL	Nominal heat input	Pinputnom	9,4	kW
	Nominal heat output	Pnom	8,5	kW
	Nominal space heat output	PSHnom	8,5	kW
	Nominal water heat output	PWnom		kW
	Fuel consumption at nominal heat output	kg/hnom	1,9	kg/h
	Efficiency at nominal heat output	ηnom	90	%
	CO ₂ at nominal heat output	CO ₂ nom	10,7	%
	CO (%) at 13% O ₂ at nominal heat output	CO%nom (13% O ₂)	0,010	% (13% O ₂)
	CO at 13% O ₂ at nominal heat output	COnom (13% O ₂)	125	mg/m ³ (13% O ₂)
	NO _x at 13% O ₂ at nominal heat output	NO _x nom (13% O ₂)	100	mg/m ³ (13% O ₂)
	OGC at 13% O ₂ at nominal heat output	OGCnom (13% O ₂)	1	mg/m ³ (13% O ₂)
	PM at 13% O ₂ at nominal heat output	PMnom (13% O ₂)	15	mg/m ³ (13% O ₂)
	Flue gas outlet temperature at nominal heat output**	Tsnom	216	°C
	Minimum flue draught at nominal heat output***	pnom	11	Pa
	Flue gas mass flow at nominal heat output	φ _{f,g} nom	5,3	g/s
REDUCED	Partial load heat input	Pinputpart	3,5	kW
	Partial load heat output	Ppart	3,2	kW
	Partial space heat output	PSHpart	3,2	kW
	Partial load water heat output	PWpart		kW
	Fuel consumption at partial load heat output	kg/hpart	0,7	kg/h
	Efficiency at part load heat output	ηpart	90	%
	CO ₂ at partial load heat output	CO ₂ part	5,4	%
	CO (%) at 13% O ₂ at partial load heat output	CO%part (13% O ₂)	0,013	% (13% O ₂)
	CO at 13% O ₂ at partial load heat output	COpart (13% O ₂)	163	mg/m ³ (13% O ₂)
	NO _x at 13% O ₂ at part load heat output	NO _x part (13% O ₂)	110	mg/m ³ (13% O ₂)
	OGC at 13% O ₂ at part load heat output	OGCpart (13% O ₂)	1	mg/m ³ (13% O ₂)
	PM at 13 % O ₂ at part load heat output	PMpart (13% O ₂)	15	mg/m ³ (13% O ₂)
	Flue gas outlet temperature at part load heat output**	Tspart	121	°C
	Minimum flue draught at partial load heat output***	ppart	11	Pa
	Flue gas mass flow at part load heat output	φ _{f,g} nom	3,6	g/s
INSTALLATION	Chimney designation	Tclass	T200G	
	Maximum load of a chimney over the appliance	mchim	20	kg
	Standing air loss	Vh		m ³ /h
	Air heating outlet diameter		80	mm
	Heatable volume (with respective requirement of 20/35/55 W/m ³)		238	m ³
	Minimum distance to combustible materials (rear)	dR	150	mm
	Minimum distance to combustible materials (side)	dS	200	mm
	Minimum distance to combustible materials (bottom)	dB	0	mm
	Minimum distance to combustible materials (ceiling)	dC	750	mm
	Minimum distance to non-combustible walls	dnon		mm
	Added protective insulation	s		mm
	Thermal conductivity additional insulation	λd		W/mK
	Minimum distance to combustible materials (radiant front)	dP	500	mm
	Minimum distance to combustible materials (radiant bottom)	dF	300	mm
	Minimum distance to combustible materials (radiant side)	dL	0	mm
ELECTRICAL CONNECTION	Electrical consumption at nominal heat output	elmax	110	W
	Electrical consumption at part load heat output	elmin	12	W
	Maximum electric power input	Wmax	370	W
	Electrical consumption at standby	eISB	2,0	W
	Power supply voltage - frequency	E - f	230-50	V - Hz

** Flue gas temperature at the appliance outlet, to be used in the chimney sizing calculation (according to EN 13384-1)

***Consider a minimum draught of 2 Pa in the EN 13384-1 chimney dimensioning calculations

Merk: CADEL				
Model: SPIN PLUS 9 UPTW K1				
SPIN PLUS 9 K1 - SPIN 9 UPTW K1 - SPIN 9 K1 - CRISTAL PLUS 9 K1 - CRISTAL 9 K1 - DUNE PLUS 9 K1 - DUNE 9 K1 - EOS 8 BI-FLUX K1 - EOS 8 K1				
EU-norm: EN 16510-1:2022 / EN 16510-2-6:2022				
ALGEMEEN NOMINAAL	Type apparaat (afdichting)	Type	CC50	
	Continue of intermitterende verbranding	CON / INT	INT	
	Brandstoftype		Pellet	
	Brandstofafmetingen		Ø6 L=3÷40	
	Milieusterclassificatie DM.186 (IT)		5 *	
	Energieklasse (schaal A++/G)		A+	
	Energie-efficiëntie index		127	EEl
	Seizoensgebonden energie-efficiëntie		86	ηS
	Nominale verbrandingswarmte	Pinputnom	9,4	kW
	Nominale nuttige warmte	Pnom	8,5	kW
	Nominale warmte aan de lucht	PSHnom	8,5	kW
	Nominale warmte aan het water	PWnom		kW
	Uurverbruik bij nominale warmte	kg/hnom	1,9	kg/h
	Rendement bij nominale warmte	ηnom	90	%
	CO2 bij nominale warmte	CO2nom	10,7	%
	CO (%) bij 13% O2 bij nominale warmte	CO%nom (13% O2)	0,010	% (13% O2)
	CO bij 13% O2 bij nominale warmte	COnom (13% O2)	159	mg/m3 (13% O2)
	NOx bij 13% O2 bij nominale warmte	NOxnom (13% O2)	100	mg/m3 (13% O2)
	OGC bij 13% O2 bij nominale warmte	OGCnom (13% O2)	1	mg/m3 (13% O2)
	PM bij 13% O2 bij nominale warmte	PMnom (13% O2)	7	mg/m3 (13% O2)
	Rookgastemperatuur bij nominale warmte**	Tsnom	200	°C
	Aanbevolen trek bij nominale warmte***	pnom	12	Pa
	Rookgas massa bij nominale warmte	φf,g nom	5,4	g/s
VERMINDERD	Gereduceerde warmte verbrand	Pinputpart	3,5	kW
	Gereduceerde nuttige warmte	Ppart	3,2	kW
	Gereduceerde warmte aan de lucht	PSHpart	3,2	kW
	Gereduceerde warmte aan het water	PWpart		kW
	Uurverbruik bij gereduceerde warmte	kg/hpart	0,7	kg/h
	Rendement bij gereduceerde warmte	ηpart	90	%
	CO2 bij gereduceerde warmte	CO2part	5,4	%
	CO (%) bij 13% O2 bij gereduceerde warmte	CO%part (13% O2)	0,013	% (13% O2)
	CO bij 13% O2 bij gereduceerde warmte	COpart (13% O2)	230	mg/m3 (13% O2)
	NOx bij 13% O2 bij gereduceerde warmte	NOxpart (13% O2)	130	mg/m3 (13% O2)
	OGC bij 13% O2 bij gereduceerde warmte	OGCpart (13% O2)	3	mg/m3 (13% O2)
	PM bij 13% O2 bij gereduceerde warmte	PMpart (13% O2)	20	mg/m3 (13% O2)
	Rookgastemperatuur bij gereduceerde warmte**	Tspart	121	°C
	Minimale trek bij gereduceerde warmte***	ppart	10	Pa
	Rookgas massa bij gereduceerde warmte	φf,g nom	3,6	g/s
INSTALLATIE	Temperatuurklasse van de schoorsteen	Tclass	T200G	
	Maximale belasting van de schoorsteen op het apparaat	mchim	20	kg
	Stilstaand luchtverlies	Vh		m3/h
	Diameter van de warmeluchtkanaliser		80	mm
	Verwarmbaar volume (met respectieve behoefte van 20/35/55 W/ m3)		238	m3
	Minimale afstand van brandbaar materiaal (achterkant)	dR	150	mm
	Minimale afstand van brandbaar materiaal (zijkant)	dS	200	mm
	Minimale afstand van brandbaar materiaal (onderkant)	dB	0	mm
	Minimale afstand van brandbaar materiaal (plafond)	dC	750	mm
	Minimale afstand van niet-brandbaar materiaal	dnon		mm
	Dikte van extra isolatie	s		mm
	Warmtegeleiding extra isolatie	λd		W/mK
	Afstand tot brandbaar materiaal (stralingsvoorkant)	dP	500	mm
	Afstand tot brandbaar materiaal (stralingsonderkant)	dF	300	mm
	Afstand tot brandbaar materiaal (stralingszijkant)	dL	0	mm

ELEKTRISCHE AANSLUITING	Elektrisch verbruik bij nominale vermogen	elmax	112	W
	Elektrisch verbruik bij gereduceerd vermogen	elmin	38	W
	Elektrisch vermogen in ontsteking	Wmax	370	W
	Elektrisch vermogen in stand-by	elSB	2,0	W
	Voedingsspanning - Voedingsfrequentie	E - f	230-50	V - Hz
** Rookgastemperatuur bij de uitlaat van het apparaat, te gebruiken bij de berekening van de schouwdimensionering (volgens EN 13384-1)				
*** Voor de berekening van de schoorsteenafmetingen (volgens EN 13384-1) rekening houden met een minimum trek van 2 Pa				

Merk: CADEL				
Model: SPIN PLUS 9 T1				
SPIN PLUS 9 K1 - SPIN 9 K1				
AFMETINGEN	Breedte van het apparaat	W	52,5	mm
	Diepte van het apparaat	L	54	mm
	Hoogte van het apparaat	H	110	mm
	Nettogewicht apparaat	m	100	kg
	Tankcapaciteit*	Tankkg	20	kg
	Autonomie van de tank bij nominale warmte*	Autnom	11	h
	Autonomie van de tank bij gereduceerde warmte*	Autpart	29	h
	Ventilatie luchtinlaat sectie		80	cm2
	Diameter verbrandingsluchtinlaat		60	mm
	Rookgasuitlaat diameter	dout	80	mm
Merk: CADEL				
Model: SPIN PLUS 9 UP-TWIN T1				
SPIN PLUS 9 UPTW K1				
AFMETINGEN	Breedte van het apparaat	W	52,5	mm
	Diepte van het apparaat	L	59	mm
	Hoogte van het apparaat	H	110	mm
	Nettogewicht apparaat	m	103	kg
	Tankcapaciteit*	Tankkg	20	kg
	Autonomie van de tank bij nominale warmte*	Autnom	11	h
	Autonomie van de tank bij gereduceerde warmte*	Autpart	29	h
	Ventilatie luchtinlaat sectie		80	cm2
	Diameter verbrandingsluchtinlaat		130	mm
	Rookgasuitlaat diameter	dout	80	mm
Merk: CADEL				
Model: CRISTAL 9 AIRTECH T1				
AFMETINGEN	Breedte van het apparaat	W	47	mm
	Diepte van het apparaat	L	50	mm
	Hoogte van het apparaat	H	110	mm
	Nettogewicht apparaat	m	95	kg
	Tankcapaciteit*	Tankkg	20	kg
	Autonomie van de tank bij nominale warmte*	Autnom	11	h
	Autonomie van de tank bij gereduceerde warmte*	Autpart	29	h
	Ventilatie luchtinlaat sectie		80	cm2
	Diameter verbrandingsluchtinlaat		60	mm
	Rookgasuitlaat diameter	dout	80	mm
Merk: CADEL				
Model: CRISTAL 9 AIR T1				
CRISTAL 9 K1				
AFMETINGEN	Breedte van het apparaat	W	47	mm
	Diepte van het apparaat	L	50	mm
	Hoogte van het apparaat	H	110	mm
	Nettogewicht apparaat	m	94	kg
	Tankcapaciteit*	Tankkg	20	kg
	Autonomie van de tank bij nominale warmte*	Autnom	11	h
	Autonomie van de tank bij gereduceerde warmte*	Autpart	29	h
	Ventilatie luchtinlaat sectie		80	cm2
	Diameter verbrandingsluchtinlaat		60	mm
	Rookgasuitlaat diameter	dout	80	mm
* * Gegevens die kunnen variëren afhankelijk van de gebruikte brandstof				

Merk: CADEL				
Model: CRISTAL PLUS 9 T2				
CRISTAL PLUS 9 K1				
AFMETINGEN	Breedte van het apparaat	W	47	mm
	Diepte van het apparaat	L	50	mm
	Hoogte van het apparaat	H	110	mm
	Nettogewicht apparaat	m	95	kg
	Tankcapaciteit*	Tankkg	20	kg
	Autonomie van de tank bij nominale warmte*	Autnom	11	h
	Autonomie van de tank bij gereduceerde warmte*	Autpart	29	h
	Ventilatie luchtinlaat sectie		80	cm2
	Diameter verbrandingsluchtinlaat		60	mm
	Rookgasuitlaat diameter	dout	80	mm
** Gegevens die kunnen variëren afhankelijk van de gebruikte brandstof				
Merk: CADEL				
Model: DUNE PLUS 9 K1				
DUNE 9 K1 - DUNE 9 T2				
AFMETINGEN	Breedte van het apparaat	W	52,5	mm
	Diepte van het apparaat	L	54	mm
	Hoogte van het apparaat	H	110	mm
	Nettogewicht apparaat	m	96	kg
	Tankcapaciteit*	Tankkg	20	kg
	Autonomie van de tank bij nominale warmte*	Autnom	11	h
	Autonomie van de tank bij gereduceerde warmte*	Autpart	29	h
	Ventilatie luchtinlaat sectie		80	cm2
	Diameter verbrandingsluchtinlaat		60	mm
	Rookgasuitlaat diameter	dout	80	mm
** Gegevens die kunnen variëren afhankelijk van de gebruikte brandstof				
Merk: FreePoint				
Model: EOS 8 T1				
EOS 8 K1				
AFMETINGEN	Breedte van het apparaat	W	52,5	mm
	Diepte van het apparaat	L	55	mm
	Hoogte van het apparaat	H	110,5	mm
	Nettogewicht apparaat	m	100	kg
	Tankcapaciteit*	Tankkg	20	kg
	Autonomie van de tank bij nominale warmte*	Autnom	11	h
	Autonomie van de tank bij gereduceerde warmte*	Autpart	29	h
	Ventilatie luchtinlaat sectie		80	cm2
	Diameter verbrandingsluchtinlaat		60	mm
	Rookgasuitlaat diameter	dout	80	mm
** Gegevens die kunnen variëren afhankelijk van de gebruikte brandstof				
Merk: FreePoint				
Model: EOS 8 BI-FLUX T1				
EOS 8 BI-FLUX K1				
AFMETINGEN	Breedte van het apparaat	W	52,5	mm
	Diepte van het apparaat	L	59	mm
	Hoogte van het apparaat	H	110,5	mm
	Nettogewicht apparaat	m	103	kg
	Tankcapaciteit*	Tankkg	20	kg
	Autonomie van de tank bij nominale warmte*	Autnom	11	h
	Autonomie van de tank bij gereduceerde warmte*	Autpart	29	h
	Ventilatie luchtinlaat sectie		80	cm2
	Diameter verbrandingsluchtinlaat		130	mm
	Rookgasuitlaat diameter	dout	80	mm
** Gegevens die kunnen variëren afhankelijk van de gebruikte brandstof				

17 TECHNICAL DOCUMENTATION FOR LOCAL SPACE HEATERS ACCORDING TO COMMISSION REGULATIONS (EU) 2015/1185 - (EU) 2015/1186 (PRODUCT FICHE)

Manufacturer	CADEL srl - Via Martiri delle Libertà 74 - 31025 Santa Lucia di Piave (TV) - Italy		
Trademark: model identifier	CADEL: SPIN PLUS 7 UP-TWIN T1 FREEPOINT: EOS 6 BI-FLUX T1 - EOS 6 T1		
Description	Pellet stove		
Indirect heating functionality	No		
Direct heat output	6,5 kW		
Indirect heat output	- kW		
CPR harmonised standard	EN 16510-1:2022 - EN 16510-2-6:2022		
Notified body	ACTECO Srl (N.B.1880)		
Preferred fuel (unique)	Compressed wood with moisture content < 12 %	YES	
	Wood logs with moisture content ≤ 25 %	NO	
	Other woody biomass	NO	
η_s		89	%
EEL		130	-
Energy Efficiency Class (A++ to G scale)		A+	
Space heating emissions at nominal heat output	PM (al 13% O ₂)	15	mg/Nm ³
	OGC (al 13% O ₂)	1	mg/Nm ³
	CO (al 13% O ₂)	125	mg/Nm ³
	NO _x (al 13% O ₂)	100	mg/Nm ³
Space heating emissions at minimum heat output <i>Only required if correction factors F(2) or F(3) are applied</i>	PM (al 13% O ₂)	15	mg/Nm ³
	OGC (al 13% O ₂)	1	mg/Nm ³
	CO (al 13% O ₂)	163	mg/Nm ³
	NO _x (al 13% O ₂)	110	mg/Nm ³
Heat output	Nominal heat output (P _{nom})	6,5	kW
	Minimum heat output (indicative) (P _{min})	3,2	kW
Useful efficiency (NCV as received)	Useful efficiency at nominal heat output ($\eta_{th,nom}$)	90	%
	Useful efficiency at minimum heat output (indicative) ($\eta_{th,min}$)	92	%
Auxiliary electricity consumption	At nominal heat output (el _{max})	0.11	kW
	At minimum heat output (el _{min})	0,012	kW
	In standby mode (el _{sb})	0,002	kW
Type of heat output/room temperature control (select one)	Single stage heat output, no room temperature control	NO	
	Two or more manual stages, no room temperature control	NO	
	With mechanic thermostat room temperature control	NO	
	With electronic room temperature control	NO	
	With electronic room temperature control plus day timer	NO	
	With electronic room temperature control plus week timer	YES	
Other control options (multiple selections possible)	Room temperature control, with presence detection	NO	
	Room temperature control, with open window detection	NO	
	With distance control option	NO	
Permanent pilot flame power requirement	Pilot flame power requirement (if applicable) (P _{pilot})	N.A.	kW
Observe the specific precautions for installation, assembly and maintenance indicated in the manual accompanying the product.			
Issue date: 02.07.2025	Legal Representative CADEL s.r.l. Via Foresto Sud, 7 - 31026 SANTA LUCIA DI PIAVE (TV) Tel. 0438 738669 - Fax 0438 73343 Partita IVA 03282110265 R.E.A. TV 227665 - Reg. Soc. Trib. TV 185949		

18 TECHNICAL DOCUMENTATION FOR LOCAL SPACE HEATERS ACCORDING TO COMMISSION REGULATIONS (EU) 2015/1185 - (EU) 2015/1186 (PRODUCT FICHE)

Manufacturer	CADEL srl - Via Martiri delle Libertà 74 - 31025 Santa Lucia di Piave (TV) - Italy		
Trademark: model identifier	CADEL: SPIN PLUS 9 T1 - SPIN PLUS 9 UP-TWIN T1 - CRISTAL 9 AIRTECH T1 - CRISTAL 9 AIR T1 - CRISTAL PLUS 9 T2 - DUNE 9 T2 FREEPOINT:EOS 8 T1 - EOS 8 BI-FLUX T1		
Description	Pellet stove		
Indirect heating functionality	No		
Direct heat output	8,5 kW		
Indirect heat output	- kW		
CPR harmonised standard	EN 16510-1:2022 - EN 16510-2-6:2022		
Notified body	ACTECO Srl (N.B.1880)		
Preferred fuel (unique)	Compressed wood with moisture content < 12 %	YES	
	Wood logs with moisture content ≤ 25 %	NO	
	Other woody biomass	NO	
η_s		87	%
EEI		127	-
Energy Efficiency Class (A++ to G scale)		A+	
Space heating emissions at nominal heat output	PM (al 13% O ₂)	15	mg/Nm ³
	OGC (al 13% O ₂)	1	mg/Nm ³
	CO (al 13% O ₂)	125	mg/Nm ³
	NO _x (al 13% O ₂)	100	mg/Nm ³
Space heating emissions at minimum heat output <i>Only required if correction factors F(2) or F(3) are applied</i>	PM (al 13% O ₂)	15	mg/Nm ³
	OGC (al 13% O ₂)	1	mg/Nm ³
	CO (al 13% O ₂)	163	mg/Nm ³
	NO _x (al 13% O ₂)	110	mg/Nm ³
Heat output	Nominal heat output (P _{nom})	8.5	kW
	Minimum heat output (indicative) (P _{min})	3.2	kW
Useful efficiency (NCV as received)	Useful efficiency at nominal heat output ($\eta_{th,nom}$)	90	%
	Useful efficiency at minimum heat output (indicative) ($\eta_{th,min}$)	90	%
Auxiliary electricity consumption	At nominal heat output (el _{max})	0,110	kW
	At minimum heat output (el _{min})	0.012	kW
	In standby mode (el _{sb})	0.002	kW
Type of heat output/room temperature control (select one)	Single stage heat output, no room temperature control	NO	
	Two or more manual stages, no room temperature control	NO	
	With mechanic thermostat room temperature control	NO	
	With electronic room temperature control	NO	
	With electronic room temperature control plus day timer	NO	
Other control options (multiple selections possible)	With electronic room temperature control plus week timer	YES	
	Room temperature control, with presence detection	NO	
	Room temperature control, with open window detection	NO	
Permanent pilot flame power requirement	With distance control option	YES	
	Pilot flame power requirement (if applicable) (P _{pilot})	N.A.	kW
Observe the specific precautions for installation, assembly and maintenance indicated in the manual accompanying the product.			
Issue date: 02.07.2024	Legal Representative CADEL s.r.l. Via Foreste Sud, 7 - 31026 SANTA LUCIA DI PIAVE (TV) Tel. 0438 738669 - Fax 0438 73343 Partita IVA 03282110265 R.E.A. TV 227665 - Reg. Soc. Trib. TV 185949		

19 TECHNICAL DOCUMENTATION FOR LOCAL SPACE HEATERS ACCORDING TO COMMISSION REGULATIONS (EU) 2015/1185 - (EU) 2015/1186 (PRODUCT FICHE)

Manufacturer	CADEL srl - Via Martiri delle Libertà 74 - 31025 Santa Lucia di Piave (TV) - Italy		
Trademark: model identifier	CADEL: SPIN 9 K1 - SPIN PLUS 9 K1 - SPIN 9 UPTW K1 - SPIN PLUS 9 UPTW K1 - CRISTAL 9 K1 - CRISTAL PLUS 9 K1 - DUNE 9 K1 - DUNE PLUS 9 K1 FREEPOINT: EOS 8 K1 - EOS 8 BI-FLUX K1		
Description	Pellet stove		
Indirect heating functionality	No		
Direct heat output	8,5 kW		
Indirect heat output	- kW		
CPR harmonised standard	EN 16510-1:2022 - EN 16510-2-6:2022		
Notified body	IMQ Spa (N.B.0051)		
Preferred fuel (unique)	Compressed wood with moisture content < 12 %	YES	
	Wood logs with moisture content ≤ 25 %	NO	
	Other woody biomass	NO	
η_s		86	%
EEL		127	-
Energy Efficiency Class (A++ to G scale)		A+	
Space heating emissions at nominal heat output	PM (al 13% O ₂)	7	mg/Nm ³
	OGC (al 13% O ₂)	1	mg/Nm ³
	CO (al 13% O ₂)	230	mg/Nm ³
	NO _x (al 13% O ₂)	100	mg/Nm ³
Space heating emissions at minimum heat output <i>Only required if correction factors F(2) or F(3) are applied</i>	PM (al 13% O ₂)	20	mg/Nm ³
	OGC (al 13% O ₂)	3	mg/Nm ³
	CO (al 13% O ₂)	159	mg/Nm ³
	NO _x (al 13% O ₂)	130	mg/Nm ³
Heat output	Nominal heat output (P _{nom})	8,5	kW
	Minimum heat output (indicative) (P _{min})	3,2	kW
Useful efficiency (NCV as received)	Useful efficiency at nominal heat output ($\eta_{th, nom}$)	90	%
	Useful efficiency at minimum heat output (indicative) ($\eta_{th, min}$)	90	%
Auxiliary electricity consumption	At nominal heat output (el _{max})	0,112	kW
	At minimum heat output (el _{min})	0,038	kW
	In standby mode (el _{sb})	0,002	kW
Type of heat output/room temperature control (select one)	Single stage heat output, no room temperature control	NO	
	Two or more manual stages, no room temperature control	NO	
	With mechanic thermostat room temperature control	NO	
	With electronic room temperature control	NO	
	With electronic room temperature control plus day timer	NO	
	With electronic room temperature control plus week timer	YES	
Other control options (multiple selections possible)	Room temperature control, with presence detection	NO	
	Room temperature control, with open window detection	NO	
	With distance control option	YES	
Permanent pilot flame power requirement	Pilot flame power requirement (if applicable) (P _{pilot})	N.A.	kW
Observe the specific precautions for installation, assembly and maintenance indicated in the manual accompanying the product.			
Issue date: 26.06.2026	Legal Representative CADEL s.r.l. Via Foreste Sud, 7 - 31025 SANTA LUCIA DI PIAVE (TV) Tel. 0438 738969 - Fax 0438 73343 Partita IVA 03262110265 R.E.A. - TV 227665 - Reg. Soc. Trib. TV 185949		

89024035A

Rev. 00- 2026



CADEL srl
31025 S. Lucia di Piave - TV
Via Martiri della Libertà, 74 - Italy

www.cadelsrl.com
www.free-point.it
www.pegasoheating.com